


14 (0.6")  
±165 (6.5')



56.8 (2.2")  
75 (3')

- PENDANTS: one
- MOUNTING: brass mounting plate 75mm (3") in diameter
- LAMPING: 1.5w LED
- INSTALLATION: threaded on - wall or ceiling mount
- MATERIALS: blown glass, electrical components, brass mounting plate
- WEIGHT: approximately 1kg (2lb)
- POWER SUPPLIES: remote mounted. Power supplies included

#### DESCRIPTION

The 's' designation in this variation on the 28 refers to it being surface mounted, with power supplies mounted remotely. This surface light has a 75mm (3") mounting plate designed for installation on walls

28 is an exploration of specificity in manufacturing. Instead of designing form itself, here the intent was to design a system of making that yields form. Individual 28 pendants result from a complex glass blowing technique whereby air pressure is intermittently introduced into and then removed from a glass matrix which is intermittently heated and then rapidly cooled. The result is a distorted spherical shape with a composed collection of imploded inner shapes, one of which acts as a shade for the light source.

Standard 28s are made with clear glass exterior spheres and milk white interior lamp holder cavities. 28s are possible with infinite versatility in colour compositions, sizes and shapes.

#### NOTES

- + Purchase replacement lamps online at [www.bocci.com/shop/bulbs](http://www.bocci.com/shop/bulbs)
- + Power supplies must be remote mounted
- + **The brass mounting base is untreated and, as such, will develop a natural patina over time.**


US Patent # D687,740  
EU Patent # 001695834-001 to 004

Made in Vancouver, Canada

Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com

approx 1kg (2lb)




SURFACE LIGHT

# 28s Brass

PRODUCT SPECIFICATION

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: [info@bocci.com](mailto:info@bocci.com)

**BOCCI**




1

Mount power supply remotely and route output wiring from power supply to surface mounted light location.

Connect the black wire to live wire and white wire to neutral wire.


Note: Standard junction boxes are not compatible with the canopy. The surface mounted light base mounts directly to the wall. Power supplies must be remote mounted in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.

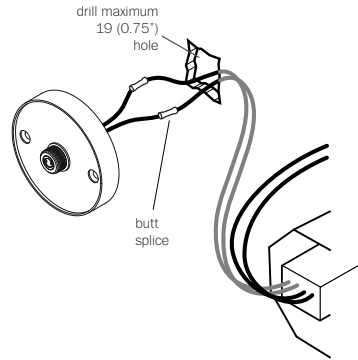

2

Drill a maximum 19mm (0.75") diameter hole.

Join power supply wiring to mounting base wiring using #16 butt splices, provided (stagger the splices).

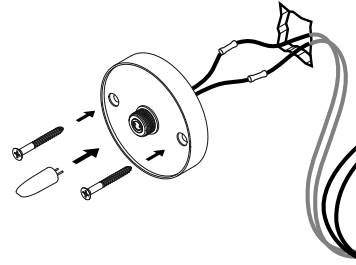


3

Tuck wiring into wall opening and affix the mounting base with fasteners provided.

Stagger the provided connectors so that they can be passed through the hole.


**Turn power to fixture on.**

Insert provided lamp into socket. Check that each lamp is working properly as you go along by keeping the power on.



4

Gently thread glass sconce onto mounting base. Do not tighten past the point of contact.



5

Clean fingerprints from surfaces.

For additional assistance, please contact Bocci:

Vancouver  
sales@bocci.com  
www.bocci.com

Berlin  
europe@bocci.com  
www.bocci.com

US Patent # D687,740  
EU Patent # 001695834-001 to 004

Made in Vancouver, Canada



LOW VOLTAGE LUMINAIRE  
E476186

SURFACE LIGHT

28s Brass

PRODUCT INSTALLATION INSTRUCTIONS

© 2021, Bocci Design and Manufacturing Inc. All rights reserved. Any inquiries should be directed to: info@bocci.com

**BOCCI**