

S M L

SPFAIRYXGRLED

fairy

Manuel Vivian

Collezione composta da faretti, lampade da parete, soffitto e sospensione con struttura in metallo e diffusore in cristallo. Disponibile in vari colori e dimensioni. Sorgente luminosa a LED integrato, dimmerabile per alcuni articoli.

Collection consisting of recessed downlights, wall, ceiling and suspended lamps with metal frame and glass diffuser. Available in several colours and sizes. Built-in (dimnable for some versions) LED light source.



GENERAL INFORMATION



COLOURS



crystal

amber

grey




chrome finish

chrome recessed canopy

chrome canopy

white canopy for 12 R, 12 and 18 versions

SP FAIRYX
kg 1,7 m³ 0,015

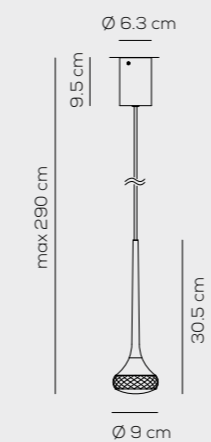

IP20 CRI90 **LED**

FAIRY / DRIVER INCLUDED

Colours / Finish

CS crystal / **CR** chrome
AM amber / **CR** chrome
GR grey / **CR** chrome

2700K


LED 5,9W - diffused beam
~717 lm ~121 lm/W source

100-240VAc

example composition code

SP FAIRYX CS CR LED

SP FAIRY I (RECESSED)
kg 1,2 m³ 0,015

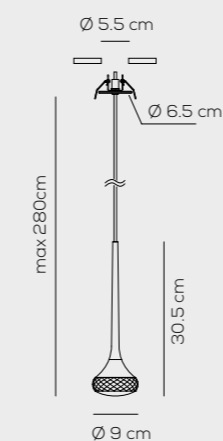

IP20 CRI90 **LED**

FAIRY / DRIVER NOT INCLUDED

Colours / Finish

CS crystal / **CR** chrome
AM amber / **CR** chrome
GR grey / **CR** chrome

2700K


LED 5,9W - 350mA - 17Vdc
~717 lm ~121 lm/W source
diffused beam

example composition code

SP FAIRY I CS CR LED

foro - hole Ø 5,5 cm / profondità min - min depth 10 cm - Collegare in serie. / Wire in series.

CEDLTC00100 standard 350mA driver - Max 8W

 **CEDLTC00103** dimmable 1-10V 350mA driver - Max 25W

CEDLTC00104 dimmable DALI 350mA driver - Max 25W

fairy

Manuel Vivian





SPFAI12RCRLED



fairy

Manuel Vivian

SP FAI 12 R
kg 14,5 m³ 0,16

FAIRY / DRIVER INCLUDED


Colours / Finish
CS crystal / CR white + chrome
AM amber / CR white + chrome
GR grey / CR white + chrome

2700K

LED 12 x 5,9W - diffused beam
12 x ~717 lm ~121 lm/W source

110-240Vac

example composition code
SP FAI12R GR CR LED

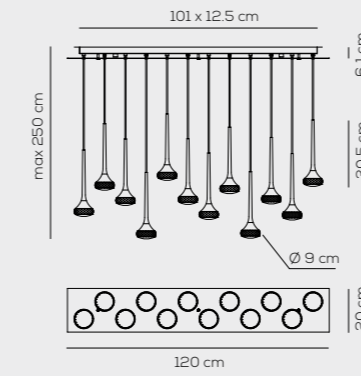

SPFAI12RAMCRLED





fairy

Manuel Vivian

SP FAIR 12
kg 14,5 m³ 0,17

IP20 CRI90 **LED**

FAIRY / DRIVER INCLUDED



Colours / Finish
CS crystal / CR white + chrome
AM amber / CR white + chrome
GR grey / CR white + chrome

2700K

LED 12 x 5,9W - diffused beam
12 x ~717 lm ~121 lm/W source

110-240Vac

example composition code
SP FAIR 12 GR CR LED

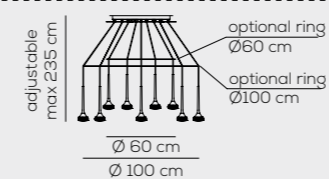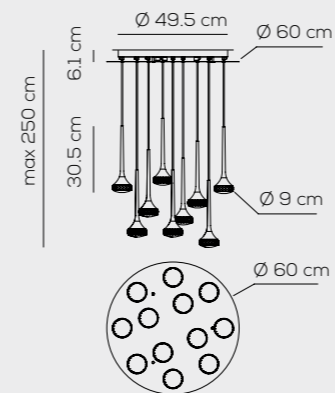

SP FAIR 18
kg 20,1 m³ 0,28

IP20 CRI90 **LED**

FAIRY / DRIVER INCLUDED



Colours / Finish
CS crystal / CR white + chrome
AM amber / CR white + chrome
GR grey / CR white + chrome

2700K

LED 18 x 5,9W - diffused beam
18 x ~717 lm ~121 lm/W source

110-240Vac

example composition code
SP FAIR 18 GR CR LED

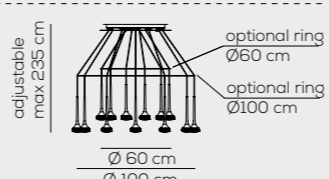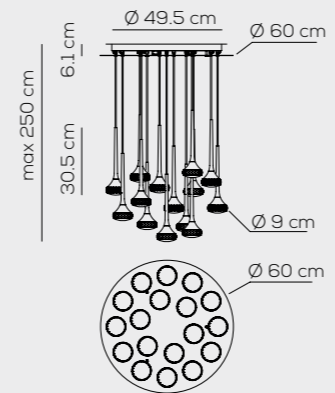

optional accessories:

kg 1,2 - m³ 0,034 - Ø 60 cm
Anello per composizione personalizzata.
Elementi di bloccaggio inclusi. /
Ring for customised composition.
Fastening elements included.

ANELLOFAIRY060X

kg 2 - m³ 0,093 - Ø 100 cm
Anello per composizione personalizzata.
Elementi di bloccaggio inclusi. /
Ring for customised composition.
Fastening elements included.

ANELLOFAIRY100X

Sugeriamo l'uso di entrambi gli anelli da Ø 60 e Ø 100 cm per la creazione di composizioni personalizzate. / We suggest the use of both the Ø 60 e Ø 100 cm rings together when creating customised compositions.



SPFAIR18CSRLED
ANELLOFAIRY060X (up ring)
ANELLOFAIRY100X (down ring)



fairy

Manuel Vivian

AP FAIRYX
kg 1,3 m³ 0,0032

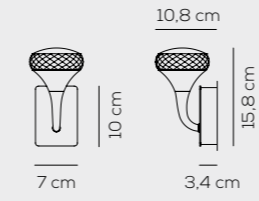

IP20 CRI90 **LED**

FAIRY / DRIVER INCLUDED

Colours / Finish
CS crystal / **CR** white + chrome
AM amber / **CR** white + chrome
GR grey / **CR** white + chrome

2700K

LED 5,9W - diffused beam
~717 lm ~121 lm/W source

100-240VAc

example composition code
AP FAIRYX GR CR LED






PLFAIRYXCSCRLED

fairy

Manuel Vivian

PL FAIRYX
kg 1,3 m³ 0,0048

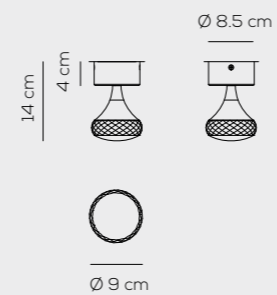

⊕ IP20 CRI90 **LED**

FAIRY / DRIVER INCLUDED

Colours / Finish
CS crystal / **CR** white + chrome
AM amber / **CR** white + chrome
GR grey / **CR** white + chrome

2700K

LED 5,9W - diffused beam
 ~717 lm ~121 lm/W source

100-240Vac

example composition code
PL FAIRYX GR CR LED





PLFAIRYXGRCRLED

fairy

Manuel Vivian

FA FAIRYX
kg 1 m³ 0.0014

  IP20 CRI90 **LED**

FAIRY / DRIVER NOT INCLUDED


Colours / Finish
CS crystal / CR chrome
AM amber / CR chrome
GR grey / CR chrome


2700K

LED 5,9W - 350mA - 17Vdc
~717 lm ~121 lm/W source
diffused beam

example composition code
FA FAIRYX CS CR LED

foro - hole Ø 8 cm / profondità min - min depth 10 cm - Collegare in serie. / Wire in series.

 CEDLTC00100 standard 350mA driver - Max 8W

 CEDLTC00103 dimmable 1-10V 350mA driver - Max 25W

 CEDLTC00104 dimmable DALI 350mA driver - Max 25W

FAFAIRYXAMCRLED



FAFAIRYXCSCRLED

