



urban & urban mini

Dima Loginoff



urban & urban mini

Dima Loginoff

Collezione composta da lampade a soffitto e sospensione in alluminio. Disponibile in tre colori e dimensioni. Le sospensioni sono disponibili anche nella versione ad incasso. Sorgente luminosa a LED integrato dimmerabile.

Collection consisting of aluminium ceiling and suspended lamps, also in a recessed version. Available in three colours and sizes. Built-in dimmable LED light source.


GENERAL INFORMATION

CE ETL in progress
EAC in progress

COLOURS



wrinkled white matt bronze matt nickel



standard canopy recessed canopy

(from left to right)
SPURBANP2XBCLCC / SPURBMIP2XBCLCC / SPURBMIG2XBRLCC
SPURBMIP2XNILCC / SPURBMIM2XNILCC / SPURBANM2XBRLCC
SPURBMIG2XNILCC / SPURBMIP2XBRLCC / SPURBMIM2XBCLCC






urban

Dima Loginoff



SP URBAN P

kg 1,9 m³ 0,02

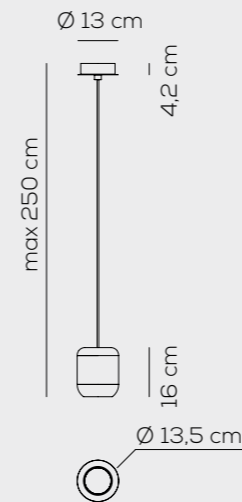

SP URBAN M

kg 2,3 m³ 0,025

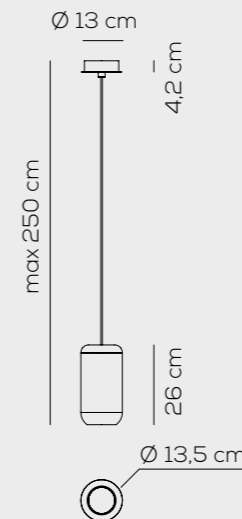

URBAN LCC / solo con illuminazione verso il basso / downward lighting only

DRIVER INCLUDED

1. 2700K
2. 3000K*
3. 3500K

Colours

BC wrinkled white
BR matt bronze
NI matt nickel


**LED 17,5W - diffuser beam
~2200 lm* ~125 lm/W* source

220-240VAC

example composition code
SP URBANP 2X NI LCC



SP URBAN P I (RECESSED) LCC

kg 1,7 m³ 0,02

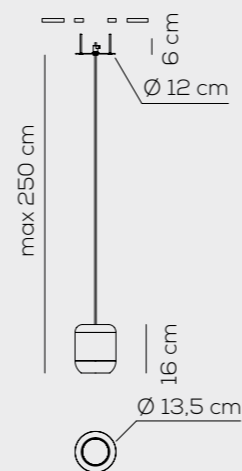

SP URBAN M I (RECESSED) LCC

kg 2,1 m³ 0,025

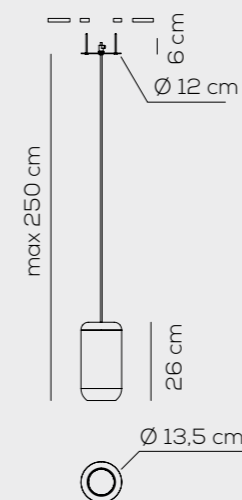

URBAN LCC / solo con illuminazione verso il basso / downward lighting only
DRIVER NOT INCLUDED

1. 2700K
2. 3000K*
3. 3500K

Colours

BC wrinkled white
BR matt bronze
NI matt nickel


**LED 17,5W - diffuser beam
~2200 lm* ~125 lm/W* source

500mA - 34,7Vdc

example composition code
SP URBANM I 3 NI LCC

foro - hole 1 x Ø 3 cm + 2 x Ø 1,4 cm
profondità min - min depth 10 cm

CEDLTC00124 dimmable Phase Cut 500mA driver - Max 20W

 **CEDLTC00126** dimmable DALI 500mA driver - Max 20W

CEDLTC00104 dimmable DALI 500mA driver - Max 35W

CEDLTC00128 dimmable 1-10V 500mA driver - Max 26,5W

** New LED / Nuovo LED

In case of temporary out of stock, a version with the following features will be available / In caso di momentanea irreperibilità sarà disponibile una versione con le seguenti caratteristiche:




3000K*
2700K available while stock last / fino ad esaurimento scorte

LED 15W - diffused beam
~1275 lm* ~85 lm/W* source

220-240VAC


PLURBANM2XBCLCC
PLURBANG2XBCLCC

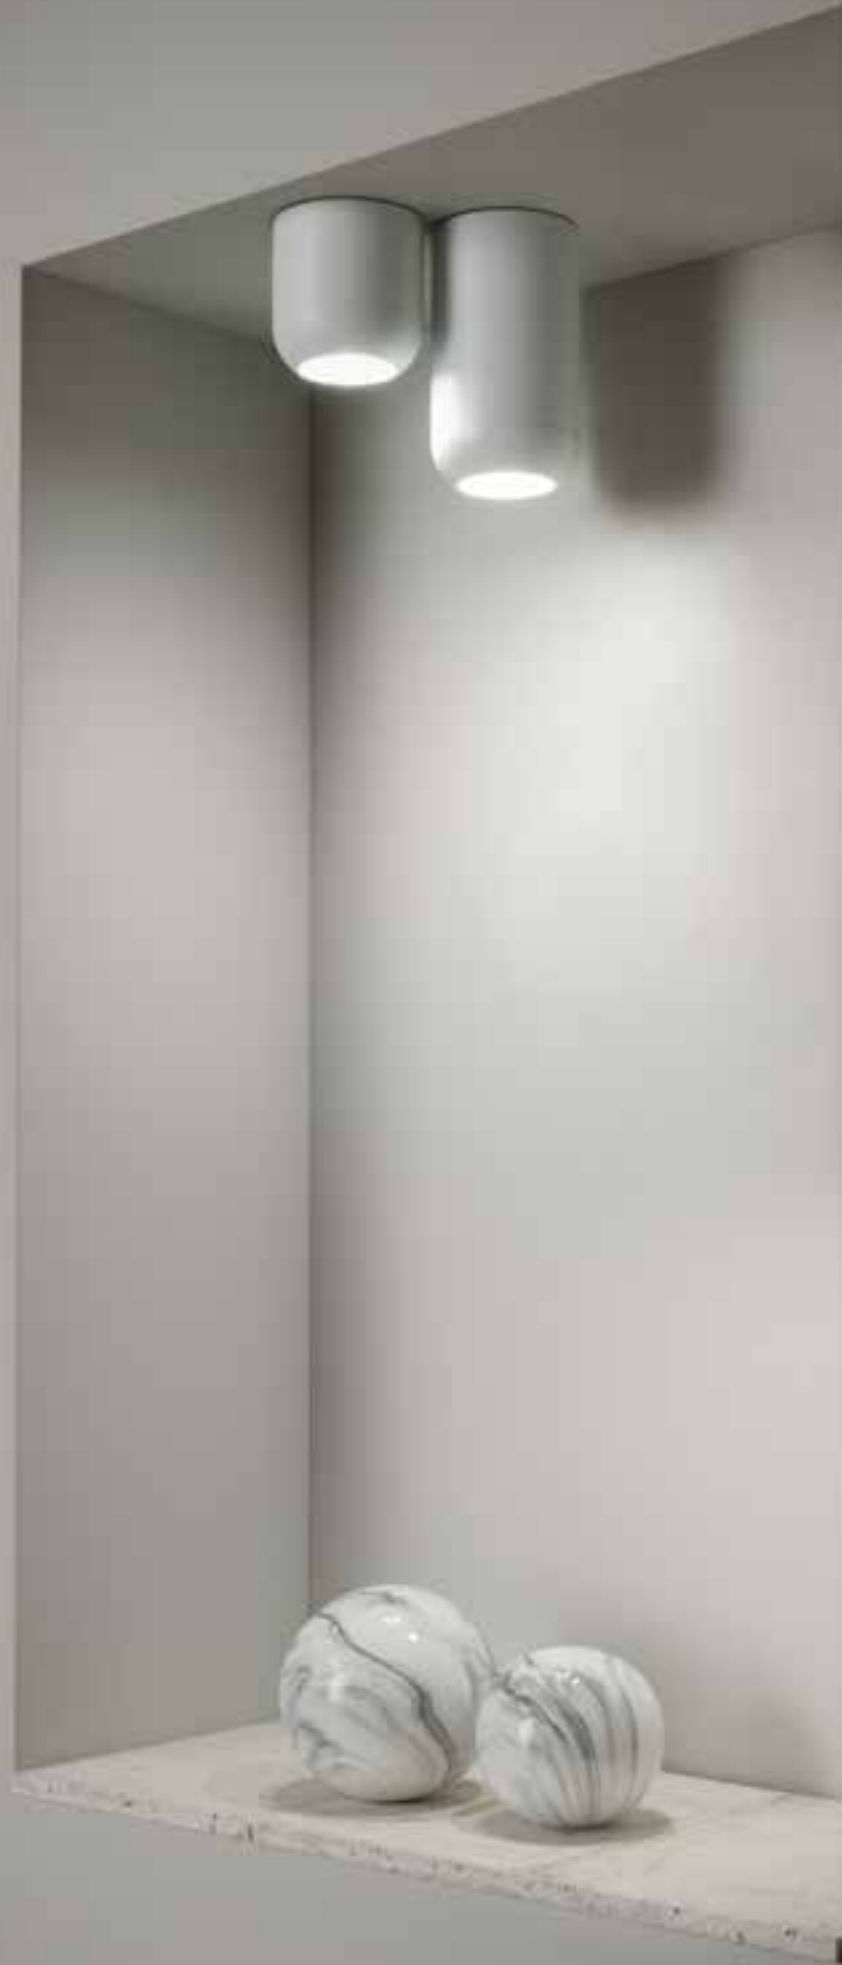


urban

Dima Loginoff

PL URBAN P
kg 1,6 m³ 0,02



  IP20 CRI90 **LED**

URBAN LCC / solo con illuminazione verso il basso / downward lighting only
DRIVER NOT INCLUDED

1. 2700K
2. 3000K*
3. 3500K


Colours
BC wrinkled white
BR matt bronze
NI matt nickel

****LED** 17,5W - diffuser beam
~2200 lm* ~125 lm/W* source

500mA - 34,7Vdc

example composition code
PL URBANP 2X NI LCC


CEDLTC00124 dimmable Phase Cut 500mA driver - Max 20W

 **CEDLTC00126** dimmable DALI 500mA driver - Max 20W



CEDLTC00104 dimmable DALI 500mA driver - Max 35W



CEDLTC00128 dimmable 1-10V 500mA driver - Max 26,5W

PL URBAN M
kg 1,3 m³ 0,02



PL URBAN G
kg 1,7 m³ 0,025



  IP20 CRI90 **LED**

URBAN LCC / solo con illuminazione verso il basso / downward lighting only

DRIVER INCLUDED

1. 2700K
2. 3000K*
3. 3500K

Colours
BC wrinkled white
BR matt bronze
NI matt nickel

****LED** 17,5W - diffuser beam
~2200 lm* ~125 lm/W* source

220-240VAC

example composition code
PL URBANM 2X NI LCC

** New LED / Nuovo LED

In case of temporary out of stock, a version with the following features will be available / In caso di momentanea irreperibilità sarà disponibile una versione con le seguenti caratteristiche:



3000K*
2700K available while stock last /
fino ad esaurimento scorte

LED 15W - diffused beam
~1275 lm* ~85 lm/W* source

220-240VAC

PLURBANP2XBCLCC




SPURBMIGI2BRLCC
SPURBMIP2NILCC
SPURBMIMI2NILCC




urban mini

Dima Loginoff



SP URBMI P
kg 0,5 m³ 0,004

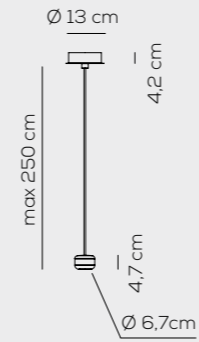

SP URBMI M
kg 0,7 m³ 0,02

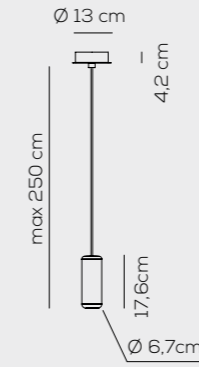

SP URBMI G
kg 1 m³ 0,025

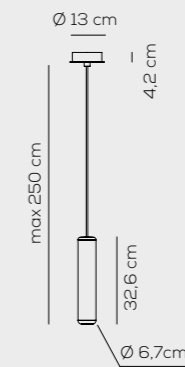

URBAN mini LCC / solo con illuminazione verso il basso / downward lighting only

DRIVER INCLUDED

1. 2700K
2. 3000K*
3. 3500K


Colours
BC wrinkled white
BR matt bronze
NI matt nickel

****LED** 6,5W - diffuser beam
~671 lm* ~103 lm/W* source


220-240VAC

example composition code
SP URBMI M 2X BC LCC

SP URBMI PI (RECESSED)
kg 0,5 m³ 0,004

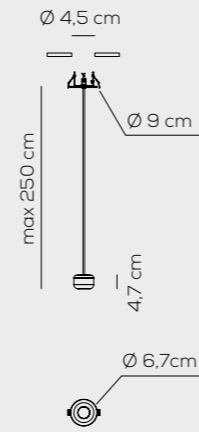

SP URBMI MI (RECESSED)
kg 0,7 m³ 0,02

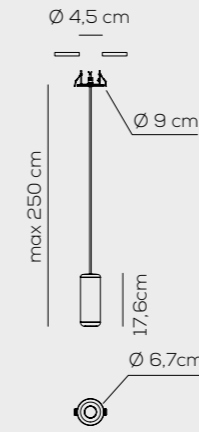

URBAN mini LCC / solo con illuminazione verso il basso / downward lighting only
COMPATIBLE WITH PIVOT SYSTEM / DRIVER NOT INCLUDED

1. 2700K
2. 3000K*
3. 3500K

Colours
BC wrinkled white
BR matt bronze
NI matt nickel

****LED** 6,5W - diffuser beam
~671 lm* ~103 lm/W* source


700mA - 9,2Vdc

example composition code
SP URBMI G 12 BC LCC

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

	CEDLTC00124 dimmable Phase Cut 700mA driver Max 20W trailing and leading edge
	CEDLTC00127 dimmable 0/1 - 10V - Push - 700mA driver - Max 9W
	CEDLTC00126 dimmable DALI 700mA driver - Max 20W
	CEDLTC00104 dimmable DALI 700mA driver - Max 50W

SP URBMI GI (RECESSED)
kg 1 m³ 0,025

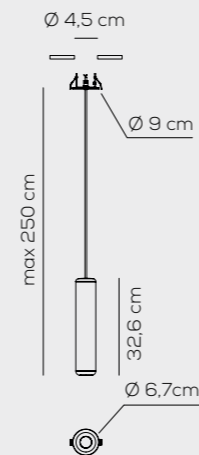

**** New LED / Nuovo LED**

In case of temporary out of stock, a version with the following features will be available / In caso di momentanea irreperibilità sarà disponibile una versione con le seguenti caratteristiche:



3000K*
2700K available while stock last / fino ad esaurimento scorte

LED 8W - diffused beam
~640 lm* ~80 lm/W* source

220-240VAC



PLURBMIM2XBCLCC
PLURBMIG2XBCLCC

urban mini

Dima Loginoff

PL URBMI P
kg 0,4 m³ 0,004



LED

URBAN mini LCC / solo con illuminazione verso il basso / downward lighting only
DRIVER NOT INCLUDED

1. 2700K
2. 3000K*
3. 3500K

Colours
BC wrinkled white
BR matt bronze
NI matt nickel

****LED** 6,5W - diffuser beam
~671 lm* ~103 lm/W* source

700mA - 9,2Vdc

example composition code
PL URBMI P 2X BC LCC


CEDLTC00124 dimmable Phase Cut 700mA driver - Max 20W trailing and leading edge

CEDLTC00127 dimmable 0/1 - 10V - Push - 700mA driver - Max 9W


CEDLTC00126 dimmable DALI 700mA driver - Max 20W

CEDLTC00104 dimmable DALI 700mA driver - Max 50W

PL URBMI M
kg 0,5 m³ 0,02

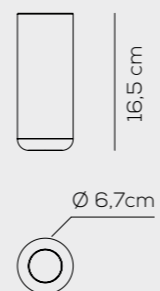

PL URBMI G
kg 0,8 m³ 0,025

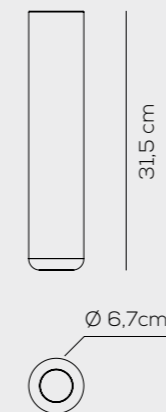

LED

URBAN mini LCC / solo con illuminazione verso il basso / downward lighting only

DRIVER INCLUDED

1. 2700K
2. 3000K*
3. 3500K

Colours
BC wrinkled white
BR matt bronze
NI matt nickel

****LED** 6,5W - diffuser beam
~671 lm* ~103 lm/W* source

220-240VAC

example composition code
PL URBMI M 2X BC LCC

** New LED / Nuovo LED

In case of temporary out of stock, a version with the following features will be available / In caso di momentanea irreperibilità sarà disponibile una versione con le seguenti caratteristiche:



3000K*
2700K available while stock last /
fino ad esaurimento scorte

LED 8W - diffused beam
~640 lm* ~80 lm/W* source

220-240VAC

