

S M

SPJEWD01NELELED

jewel  
Studio Yonoh



jewel  
Studio Yonoh

Collezione di lampade a sospensione in alluminio con arco in nylon e fibre di vetro da riciclo. Disponibile in colore nero e quattro versioni. Sorgente luminosa a LED integrato dimmerabile.

*Collection of aluminum suspended lamps with glass filled nylon arch made with recycled materials. Available in four pre-defined configurations in black color. Build-in dimmable LED light source.*

GENERAL INFORMATION



DRIVER INCLUDED DIMMABLE

COLOURS



black

greige  
upon request

produced  
with recycled  
material

SP JEWD 01  
kg 0,9 m³ 0,039

IP20 CRI>90 LED

Colours / Finish  
NE black / NE black  
GE greige / NE black upon request


3000K\*  
2700K upon request  
3500K upon request

optic ~ 38° beam, 12° upon request

LED 6,5W  
~671 lm\* ~103 lm/W\* source

220-240VAC



example composition code  
SP JEWD 01 NE NE LED

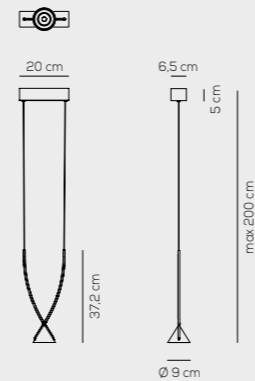

SPJEWD03NELELED



SP JEWD 03  
kg 3,5 m³ 0,0208

  IP20 CRI>90 **LED**

Colours / Finish  
NE black / NE black  
GE greige / NE black upon request


3000K\*  
2700K upon request  
3500K upon request

optic ~ 38° beam, 12° upon request

LED 3 x 6,5W  
~2013 lm\* ~103 lm/W\* source

220-240VAC


example composition code  
SP JEWD 03 NE NE LED

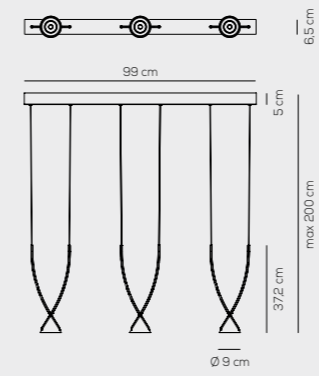





SPJEWD04NELED



SP JEWD 04  
kg 8,7 m³ 0,065

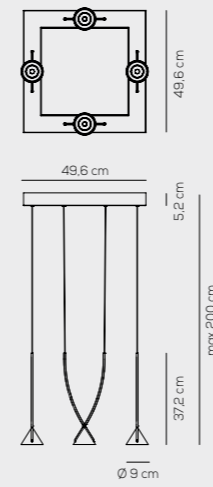

    IP20 CRI>90 LED

Colours / Finish  
NE black / NE black  
GE greige / NE black upon request

3000K\*  
2700K upon request  
3500K upon request


optic ~ 38° beam, 12° upon request





LED 4 x 6,5W  
~2684 lm\* ~103 lm/W\* source

220-240VAC

example composition code  
SP JEWD 04 NE NE LED

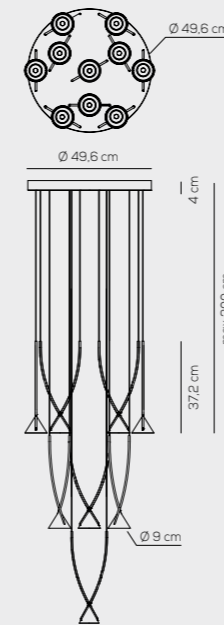SP JEWD 10  
kg 8,7 m³ 0,201



    IP20 CRI>90 LED

Colours / Finish  
NE black / NE black  
GE greige / NE black upon request

3000K\*  
2700K upon request  
3500K upon request

optic ~ 38° beam, 12° upon request

LED 10 x 6,5W  
~6710 lm\* ~103 lm/W\* source

110-240VAC

example composition code  
SP JEWD 10 NE NE LED

SPJEWD10NELED



S

SPJM0132ORNELED

# jewel mono

Studio Yonoh



SPJM0132NEGRLED



SPJMI132NEGRLED



# jewel mono

Studio Yonoh

Collezione di lampade a sospensione in alluminio con arco in nylon riciclato PA12 arch. Disponibile in diverse versioni. La sorgente luminosa è a LED integrato dimmerabile o non dimmerabile. La particolare tecnica di produzione dell'archetto può avere lievi differenze di tonalità.

*Collection consisting of suspended lamps made of aluminium and recycled PA12 arch. Available in different versions. Built-in dimmable or not dimmable LED light source. The particular production technique of the small arch could have slight differences of tonality.*

## GENERAL INFORMATION

### COLOURS



black / black

black / grey

gold / black

greige / black upon request

**SP JM 01**  
kg 0,9 m³ 0,004



CE ETL in progress  
EAC in progress

IP20 CRI>90 **LED**

**JEWEL / DRIVER INCLUDED DIMMABLE**

1 - 12° beam - degreese  
3 - 38° beam - degreese

1 - 2700K  
2 - 3000K\*  
3500K upon request


**Colours / Finish**  
NE black / NE black  
NE black / GR grey  
OR gold / NE black  
GE greige / NE black upon request

LED 6,5W  
~671 lm\* ~103 lm/W\* source

220-240VAC

example composition code  
SP JM 01 1 1 NE NE LED

**SP JM 11 (RECESSED)**  
kg 0,9 m³ 0,004

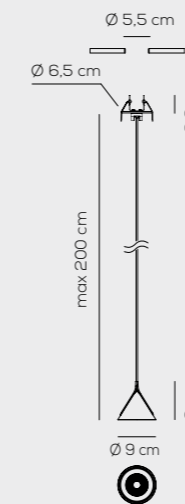

CE ETL in progress  
EAC in progress

IP20 CRI>90 **LED**

**JEWEL / DRIVER NOT INCLUDED  
COMPATIBLE WITH PIVOT SYSTEM**

1 - 12° beam - degreese  
3 - 38° beam - degreese

1 - 2700K  
2 - 3000K\*  
3500K upon request


**Colours / Finish**  
NE black / NE black  
NE black / GR gray  
OR gold / NE black  
GE greige / NE black upon request

LED 6,5W  
~671 lm\* ~103 lm/W\* source

700mA 9,2Vbc

example composition code  
SP JM 11 1 1 NE NE LED

**CEDLTC00124** dimmable Phase Cut 700mA driver - Max 20W trailing and leading edge

 **CEDLTC00127** dimmable 0/1 - 10V - Push - 700mA driver - Max 9W

**CEDLTC00126** dimmable DALI 700mA driver - Max 20W

**CEDLTC00104** dimmable DALI 700mA driver - Max50W