

# Skán


Design by Lievore, Altherr, Molina

Minimal volume and maximum lighting functionality. Skán represents a return to what is essential: pure, delicate lines in which the light is the fundamental element while the shape is almost invisible.

## Floor



### O250



#### Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500-N)
- 37/ \_\_ Terra Red (NCS S4040-Y70R)

Finish customization  
(Available options:  
Vibia colour palette)

#### Materials

Head: Aluminum. Diffuser: Methacrylate.  
Base: Zamak.

#### Light Source and electronics

1 x LED PLATE 24V 8 W  
Constant Voltage 24V  
110-240V 50/60Hz

#### LED temperature colour

/2\_ 3000 K  
CRI >80 339,2 lm 42,4 lm/W

#### Control

0250 \_\_ / \_\_ 6  
Optical Sensor

#### Packaging

1 Box 1,50 x 0,34 x 0,32 m  
Vol 0,0418 m<sup>3</sup>  
Gross weight 6 Kg Net weight 3 Kg

#### Notes


**UNTIL STOCK RUNS OUT**



Dimmer Bi-volt



0260



Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500-N)
- 37/ \_\_ Terra Red (NCS S4040-Y70R)

Finish customization  
 (Available options:  
 Vibia colour palette)

LED temperature colour

- /1 \_ 2700 K  CRI >90 4430,16 lm 159 lm/W
- /2 \_ 3000 K  E CRI >90 3792,73 lm 136 lm/W
- /3 \_ 3500 K  D CRI >90 4799,9 lm 172,0 lm/W

Control

0260 \_\_ / \_ 5  
 Push

Materials

Head: Aluminum. Diffuser: Methacrylate.  
 Vertical tube: Steel.

Light Source and electronics

3 x LED 9,2 W 500 mA  
 Constant Current 500 mA  
 110-240V 50/60Hz

Packaging


1 Box 2,11 x 0,60 x 0,60 m  
 Vol 0,7596 m<sup>3</sup>  
 Gross weight 5,4 Kg Net weight 2,5 Kg

LED  IP20  CE  EAC    
 Dimmer  Bi-volt

---


Pendants

0270




ø 30 cm

0271




ø 30 cm

0275

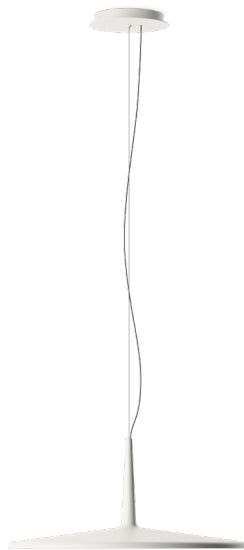


ø 60 cm

0276

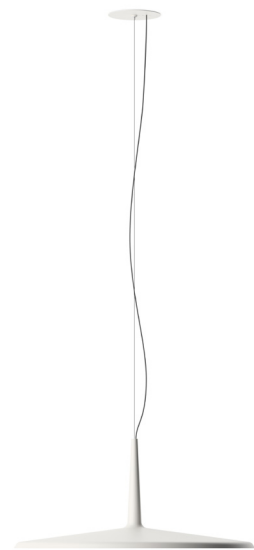

ø 60 cm

0280

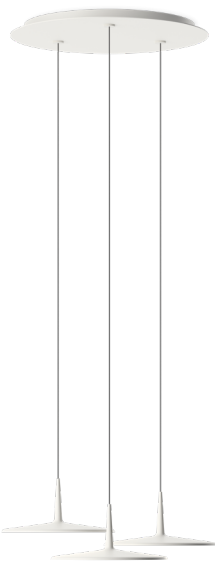


ø 30 cm

0282



ø 30 cm

## 0270



### Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500-N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_\_ Terra Red (NCS S4040-Y70R)
- 42/ \_\_ Blue M1 (NCS S 5010-B10G)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1\_ 2700 K CRI >90 1269 lm 141 lm/W
- /2\_ 3000 K CRI >80 1123 lm 125 lm/W
- /3\_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

### Control

- 0270 \_\_ / \_ 1 DALI-2
- 0270 \_\_ / \_ 2 0-10V
- 0270 \_\_ / \_ Z Casambi

### Materials

Body: Aluminum. Diffuser: Methacrylate.  
Canopy Plate: Steel.

### Light Source and electronics

1 x LED 9,3 W 350 mA  
Constant Current 350 mA  
110-277V 50/60Hz

### Packaging


1 Box 0,29 x 0,38 x 0,38 m  
Vol 0,0418 m<sup>3</sup>  
Gross weight 2,6 Kg Net weight 1,4 Kg

### Notes

Surface.  
Extra cable length.



## 0271



### Finishes

- 10/ \_\_ White (NCS S 0300-N)
- 11/ \_\_ Black (NCS S 8500-N)
- 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
- 37/ \_\_ Terra Red (NCS S4040-Y70R)
- 42/ \_\_ Blue M1 (NCS S 5010-B10G)
- 47/ \_\_ Green L1 (NCS S 4005-G80Y)

Finish customization  
(Available options:  
Vibia colour palette)

### LED temperature colour

- /1\_ 2700 K CRI >90 1269 lm 141 lm/W
- /2\_ 3000 K CRI >80 1269 lm 125 lm/W
- /3\_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

### Control

- 0271 \_\_ / \_ 1 DALI
- 0271 \_\_ / \_ B 1-10V, Push
- 0271 \_\_ / \_ Z Casambi

### Materials

Body: Aluminum. Diffuser: Methacrylate.  
Canopy Plate: Steel.

### Light Source and electronics

1 x LED 9,3 W 350 mA  
Constant Current 350 mA  
110-240V 50/60Hz


### Packaging

1 Box 0,29 x 0,38 x 0,38 m  
Vol 0,0418 m<sup>3</sup>  
Gross weight 2,5 Kg Net weight 1,4 Kg

### Notes

Built-in.  
Extra cable length.


**UNTIL STOCK RUNS OUT**



### Electrical connection

- Surface
- \_18 Free Wire
- \_23 Built-in
- \_31 Remote Micro for plaster ceilings
- \_32 Remote XXS for all types of drop ceilings

0275



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
(Available options:  
Vibia colour palette)

- LED temperature colour**
- /1\_ 2700 K CRI >90 1269 lm 91 lm/W
  - /2\_ 3000 K CRI >80 1575 lm 113 lm/W
  - /3\_ 3500 K CRI >90 1375,3 lm 98,9 lm/W

- Control**
- 0275 \_\_ / \_ 1 DALI-2
  - 0275 \_\_ / \_ B 1-10V, Push
  - 0275 \_\_ / \_ Z Casambi

**Materials**  
Body: Aluminum. Diffuser: Methacrylate.  
Canopy Plate: Steel.


**Light Source and electronics**  
1 x LED 13,9 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz

**Packaging**  
1 Box 0,42 x 0,71 x 0,66 m  
Vol 0,2000 m<sup>3</sup>  
Gross weight 7 Kg Net weight 4,4 Kg

**Notes**  
Surface.  
Extra cable length.



0276



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
(Available options:  
Vibia colour palette)

- LED temperature colour**
- /1\_ 2700 K CRI >90 1269 lm 91 lm/W
  - /2\_ 3000 K CRI >80 1575 lm 113 lm/W
  - /3\_ 3500 K CRI >90 1375,3 lm 98,9 lm/W

- Control**
- 0276 \_\_ / \_ 1 DALI-2
  - 0276 \_\_ / \_ B 1-10V, Push
  - 0276 \_\_ / \_ Z Casambi


**Materials**  
Body: Aluminum. Diffuser: Methacrylate.  
Canopy Plate: Steel.

**Light Source and electronics**  
1 x LED 13,9 W 500 mA  
Constant Current 500 mA  
110-240V 50/60Hz


**Packaging**  
1 Box 0,42 x 0,71 x 0,66 m  
Vol 0,2000 m<sup>3</sup>  
Gross weight 7 Kg Net weight 4,4 Kg

**Notes**  
Suitable for built-in and surface fitting.  
Extra cable length.

**UNTIL STOCK RUNS OUT**



0280



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
 (Available options:  
 Vibia colour palette)

- LED temperature colour**
- /1\_ 2700 K CRI >90 3123 lm 112 lm/W
  - /2\_ 3000 K CRI >80 3369 lm 121 lm/W
  - /3\_ 3500 K CRI >90 4124,7 lm 147,8 lm/W

- Control**
- 0280 \_\_ / \_ 1 DALI-2
  - 0280 \_\_ / \_ B 1-10V, Push
  - 0280 \_\_ / \_ Z Casambi

**Materials**

Body: Aluminum. Diffuser: Methacrylate.  
 Canopy Plate: Steel.

**Light Source and electronics**

3 x LED 9,3 W 350 mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**


2 Boxes  
 Total Vol 0,2226 m<sup>3</sup>  
 Gross weight 13,7 Kg Net weight 9,2 Kg

**Notes**

Surface.  
 Extra cable length.



0282



- Finishes**
- 10/ \_\_ White (NCS S 0300-N)
  - 11/ \_\_ Black (NCS S 8500-N)
  - 24/ \_\_ Beige M1 (NCS S 2005-Y50R)
  - 37/ \_\_ Terra Red (NCS S4040-Y70R)
  - 42/ \_\_ Blue M1 (NCS S 5010-B10G)
  - 47/ \_\_ Green L1 (NCS S 4005-G80Y)
- Finish customization**  
 (Available options:  
 Vibia colour palette)

- LED temperature colour**
- /1\_ 2700 K CRI >90 5205 lm 112 lm/W
  - /2\_ 3000 K CRI >80 5615 lm 121 lm/W
  - /3\_ 3500 K CRI >90 6874,5 lm 147,8 lm/W

- Control**
- 0282 \_\_ / \_ 1 DALI-2
  - 0282 \_\_ / \_ B 1-10V, Push
  - 0282 \_\_ / \_ Z Casambi

**Materials**

Body: Aluminum. Diffuser: Methacrylate.  
 Canopy Plate: Steel.

**Light Source and electronics**

5 x LED 9,3 W 350mA  
 Constant Current 350 mA  
 110-240V 50/60Hz

**Packaging**

2 Boxes  
 Total Vol 0,3290 m<sup>3</sup>  
 Gross weight 36,9 Kg Net weight 29 Kg

**Notes**


Surface.  
 Extra cable length.




# Composing pendants

Next sketches are composed by one or more compositions


---

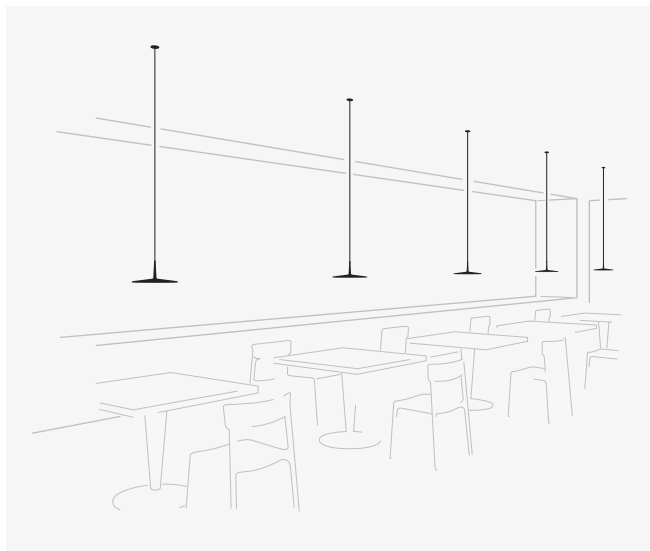

5 x 0270.

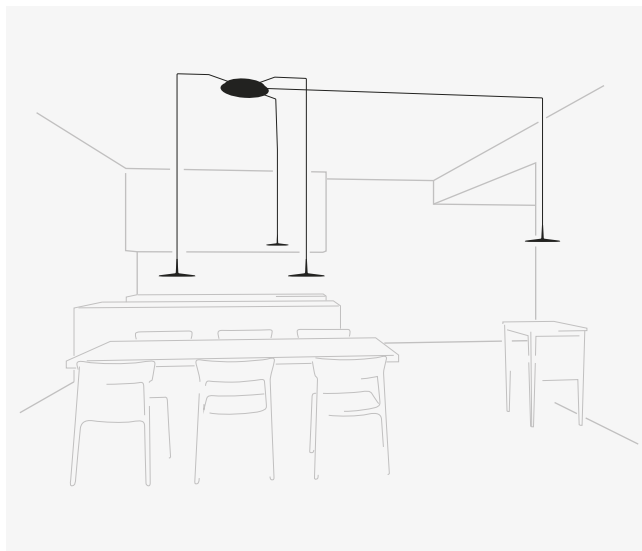


4 x 0270.

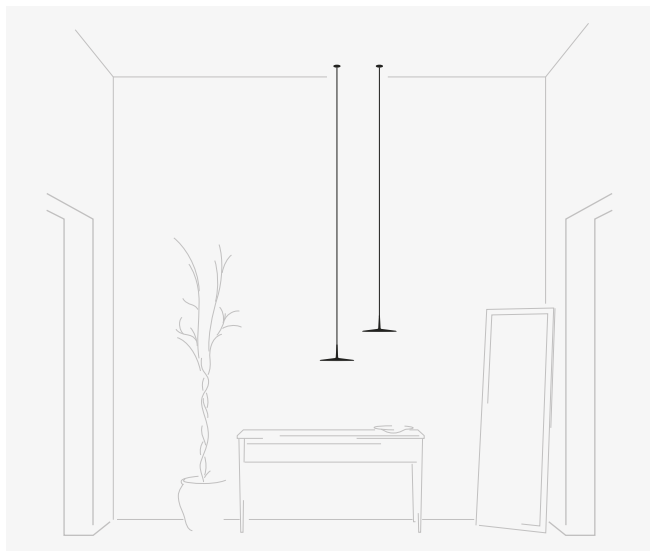

2 x 0270.

Each project is unique.  
Visit [vibia.com](http://vibia.com) and  
chose among multiple  
compositions designed  
and adapted to your  
project needs.

Personalise your own  
Skan composition quick  
and easy at [vibia.com](http://vibia.com)

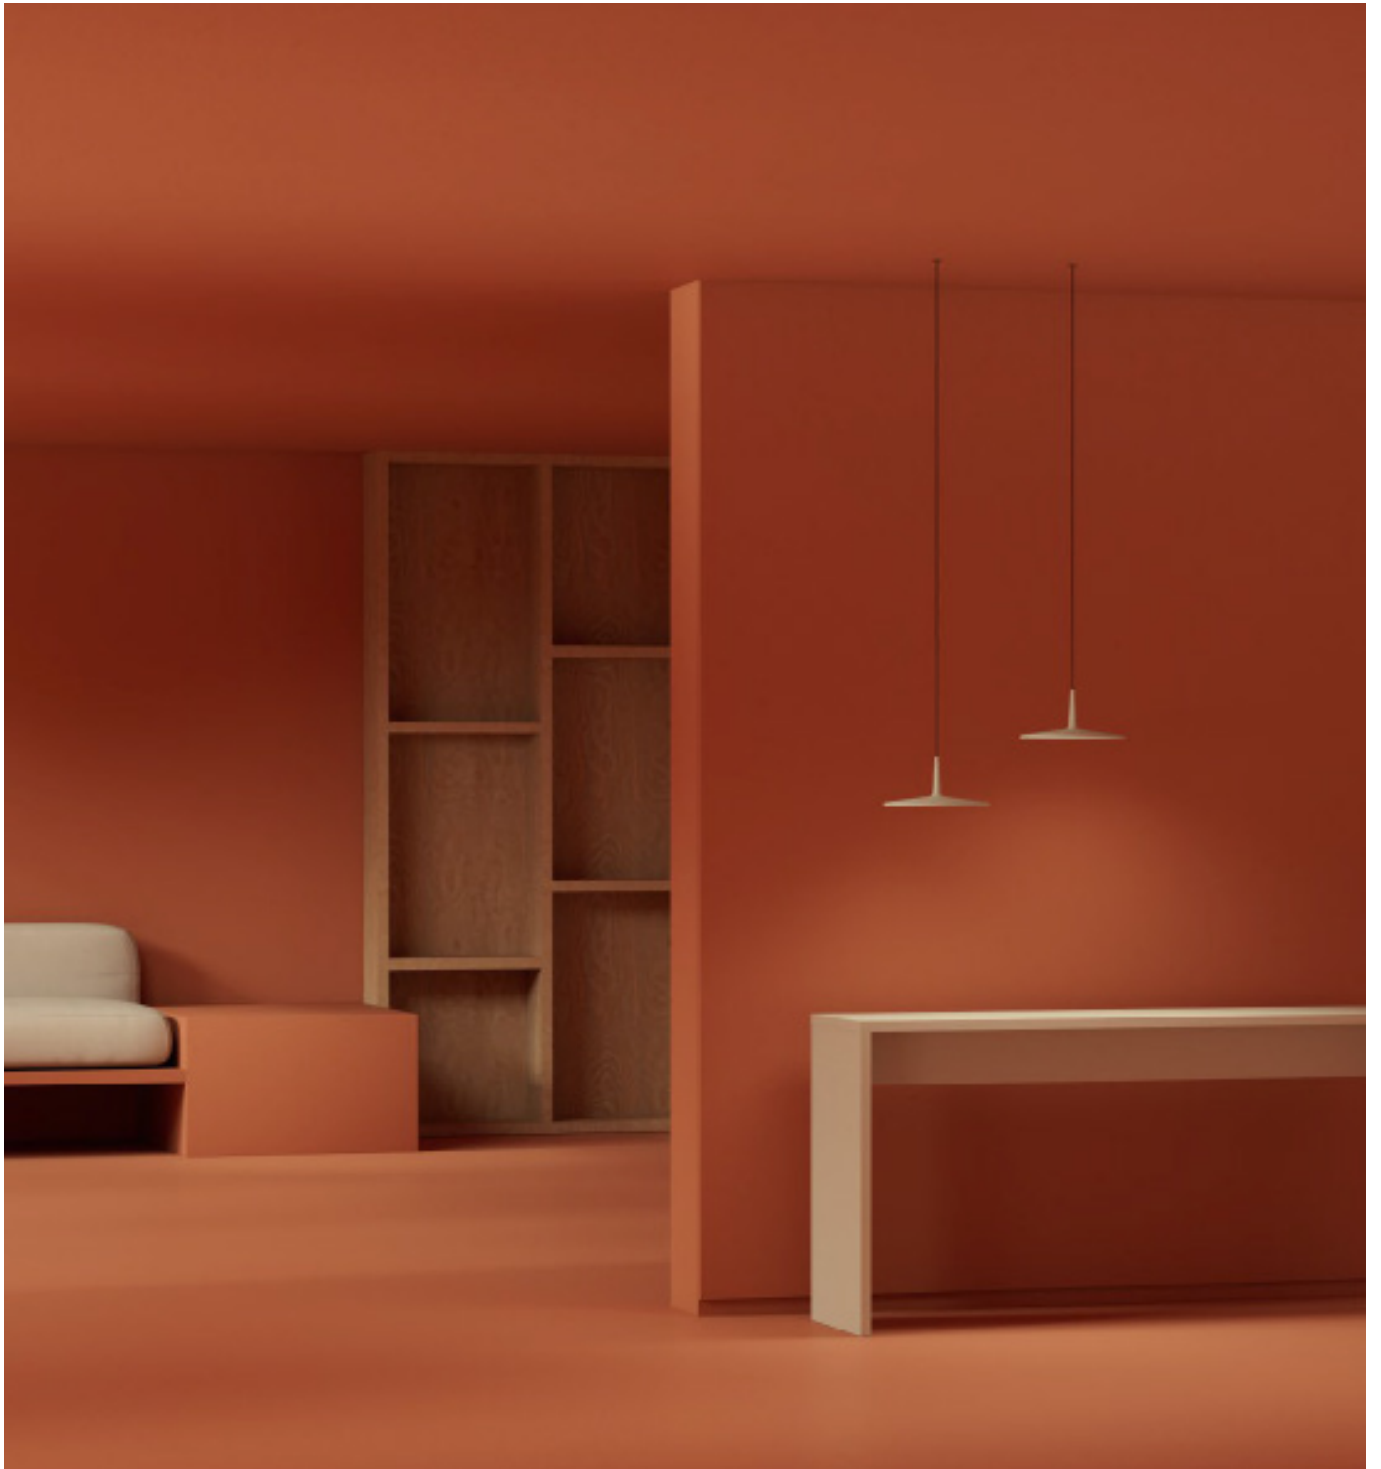



# Electrical connection options for model 0270


Choose your preferred installation option according to your needs. For each composition, the optimal minimum number of drivers will be delivered.

## Drop ceiling



The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 0270

### Remote



**Micro**  $\varnothing$  3 cm  
height 7 cm  
for plaster ceilings.  
Black finish.




**XXS**  $\varnothing$  6 cm  
height 6 cm  
for all types of drop  
ceilings. Match with  
fixture finish.

### Built-in



$\varnothing$  8 cm  
height 6 cm  
match with  
fixture finish.



## Regular ceiling


When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 0270


### Surface



ø 17,3 cm  
match with  
fixture finish.




### Free Wire




1 wire

ø 20 cm




2 wires

ø 22 cm



3 - 6 wires

ø 36 cm



7 - 8 wires

ø 40 cm

you can choose the finish of the canopy  
among black, white or any colour  
matching one of the pendants.

