


Halo Jewel

Design by Martín Azúa

Subtle light floating in the air and delicately suspended by a perfectly crafted steel structure. Light and matter in one.


Pendants

2350

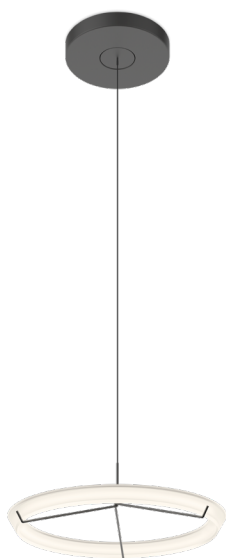


ø 56,3 cm

2351

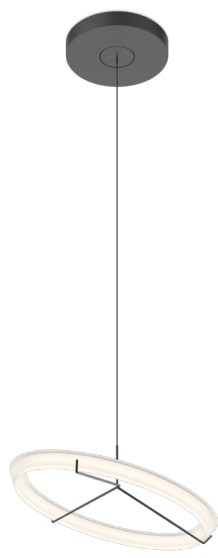


ø 56,3 cm

2355




max. 350 cm


2356



max. 350 cm

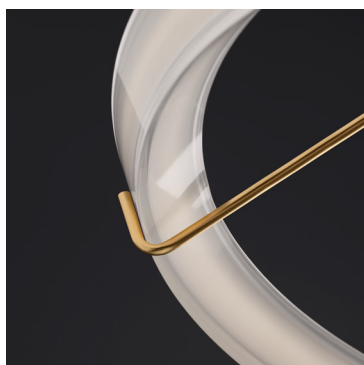

2350

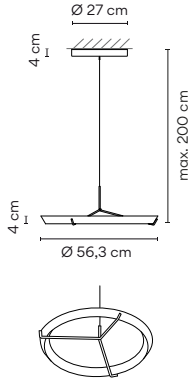

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K **G**
 CRI >90 1904 lm 83 lm/W
 /2 _ 3000 K **F**
 CRI >80 2024 lm 88 lm/W

Control
 2350 _ _ / _ 1
 DALI
 2350 _ _ / _ 3
 1-10V
 2350 _ _ / _ Z
 Casambi

Finishes
 ● 20/ _ _ Gold
 (Gold)

LED Colour Temperature
 /1 _ 2700 K **G**
 CRI >90 1904 lm 83 lm/W
 /2 _ 3000 K **F**
 CRI >80 2024 lm 88 lm/W

Control
 2350 _ _ / _ 1
 DALI
 2350 _ _ / _ 3
 1-10V
 2350 _ _ / _ Z
 Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum.
 Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
 Vol 0,097 m³
 Gross weight 7 Kg Net weight 6,35 Kg

Notes


Extra cable length.



Electrical connection

Surface
 _18 Free Wire
 _23 Built-in
 _31 Remote
 Micro
 for plaster ceilings
 _32 Remote
 XXS
 for all types
 of drop
 ceilings

2351

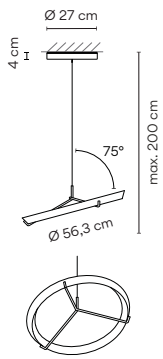

Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED Colour Temperature
 /1 _ 2700 K **G**
 CRI >90 1904 lm 83 lm/W
 /2 _ 3000 K **F**
 CRI >80 2024 lm 88 lm/W

Control
 2351 _ _ / _ 1
 DALI
 2351 _ _ / _ 3
 1-10V
 2351 _ _ / _ Z
 Casambi

Finishes
 ● 20/ _ _ Gold
 (Gold)

LED Colour Temperature
 /1 _ 2700 K **G**
 CRI >90 1904 lm 83 lm/W
 /2 _ 3000 K **F**
 CRI >80 2024 lm 88 lm/W

Control
 2351 _ _ / _ 1
 DALI
 2351 _ _ / _ 3
 1-10V
 2351 _ _ / _ Z
 Casambi

Materials

Diffuser: Methacrylate. LED support: Aluminum.
 Pendant structure: Steel. Ceiling rose: Steel.

Light Source and electronics

1 x LED STRIP 24V 23 W
 Constant Voltage 24V
 100~277V 50/60Hz

Packaging

1 Box 0,6 x 0,6 x 0,27 m
 Vol 0,097 m³
 Gross weight 7 Kg Net weight 6,35 Kg

Notes


Extra cable length.



Electrical connection

Surface
 _18 Free Wire
 _23 Built-in
 _31 Remote
 Micro
 for plaster ceilings
 _32 Remote
 XXS
 for all types
 of drop
 ceilings

2355



Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K CRI >90 1415 lm 94 lm/W /2 _ 3000 K CRI >80 1224 lm 80 lm/W	2355 __ / _ 1 DALI 2355 __ / _ 3 1-10V 2355 __ / _ Z Casambi

Finishes	LED Colour Temperature	Control
● 20/ __ Gold (Gold)	/1 _ 2700 K CRI >90 1415 lm 94 lm/W /2 _ 3000 K CRI >80 1224 lm 80 lm/W	2355 __ / _ 1 DALI 2355 __ / _ 3 1-10V 2355 __ / _ Z Casambi


Materials	Packaging
Diffuser: Methacrylate. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	1 Box 0,13 x 0,19 x 1,265 m Vol 0,0312 m ³ Gross weight 5 Kg Net weight 4,1 Kg
Light Source and electronics	Notes
1 x LED STRIP 24V 15,3 W Constant Voltage 24V 220-240V 50/60Hz	Extra cable length.



Electrical connection

- Surface
- _18 Free Wire
- _23 Built-in
- _31 Remote
- Micro for plaster ceilings
- _32 Remote XXS for all types of drop ceilings

2356



Finishes	LED Colour Temperature	Control
● 11/ __ Black (NCS S 8500-N)	/1 _ 2700 K CRI >90 4246 lm 94 lm/W /2 _ 3000 K CRI >80 3672 lm 80 lm/W	2356 __ / _ 1 DALI 2356 __ / _ 3 1-10V 2356 __ / _ Z Casambi

Finishes	LED Colour Temperature	Control
● 20/ __ Gold (Gold)	/1 _ 2700 K CRI >90 4246 lm 94 lm/W /2 _ 3000 K CRI >80 3672 lm 80 lm/W	2356 __ / _ 1 DALI 2356 __ / _ 3 1-10V 2356 __ / _ Z Casambi


Materials	Packaging
Diffuser: Methacrylate. LED support: Aluminum. Pendant structure: Steel. Ceiling rose: Steel.	1 Box 0,31 x 0,33 x 2 m Vol 0,2046 m ³ Gross weight 7,4 Kg Net weight 6,06 Kg
Light Source and electronics	Notes
3 x LED STRIP 24V 15,3 W Constant Voltage 24V 100-277V 50/60Hz	Extra cable length.





Composing pendants


Next sketches are composed by one or more compositions

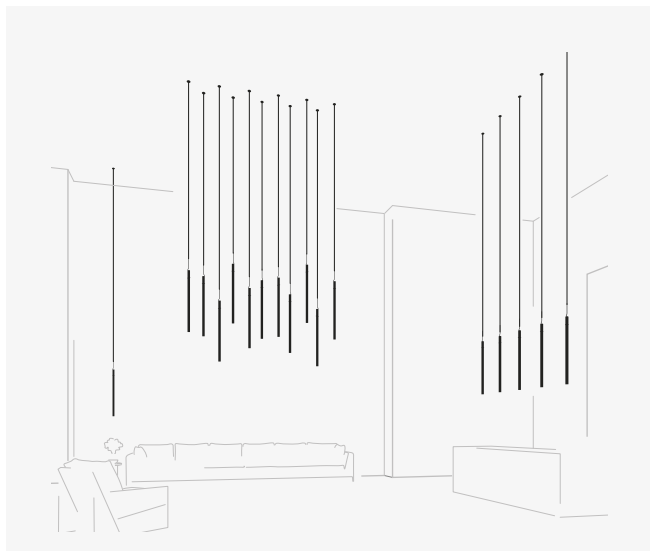

17 x 2355.



1 x 2350 and 2 x 2351.

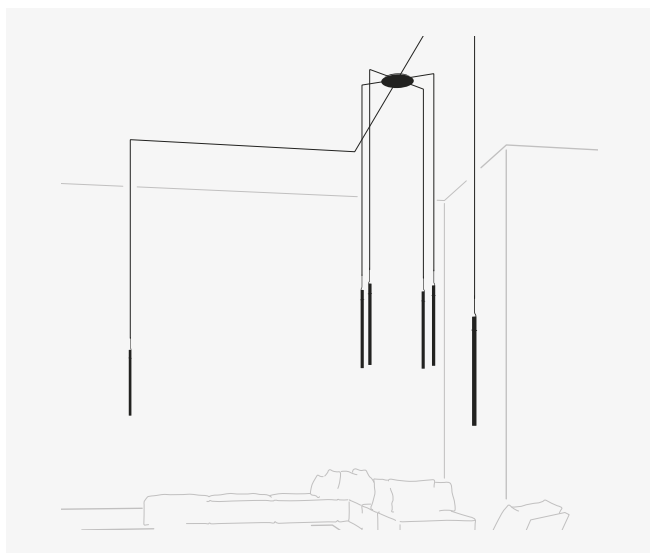

6 x 2355.

Each project is unique.
Visit vibia.com and
chose among multiple
compositions designed
and adapted to your
project needs.

Personalise your own
Halo composition quick
and easy at vibia.com



Electrical connection options for models 2350 / 2351 / 2355


Choose your preferred installation option
according to your needs.
For each composition, the optimal minimum
number of drivers will be delivered.

Drop ceiling



The innovative remote and built-in fittings accentuate
the silkiness and lightness of compositions on
suspended ceilings, its great visual grandeur taking
center stage.

For Ref. 2350 / 2351 / 2355

Remote



Micro \varnothing 3 cm
height 7 cm
for plaster ceilings.
Black finish.




XXS \varnothing 6 cm
height 6 cm
for all types of drop
ceilings. Match with
fixture finish.



Built-in



\varnothing 8 cm
height 6 cm
match with
fixture finish.



Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.


For Ref. 2350 / 2351

Surface




ø 27 cm
match with
fixture finish.


Free Wire



ø 22 cm




ø 36 cm



ø 40 cm


For Ref. 2355

Surface




ø 16 cm
match with
fixture finish.


Free Wire



ø 20 cm



ø 36 cm



ø 40 cm

you can choose the finish of the canopy
among black, white or any colour
matching one of the pendants.

