

Tempo

Design by Lievore, Altherr

Timeless character. The Tempo collection by Lievore Altherr reclaims our collective memory of light, making it contemporary through its most essential expression. Shades with an architectonic profile recreate different ambiances bringing them right up-to-date with new additions and uses.

Wall



5756 5757



5758 5759



5760 5761




5762 5763



5764 5765



5766 5767

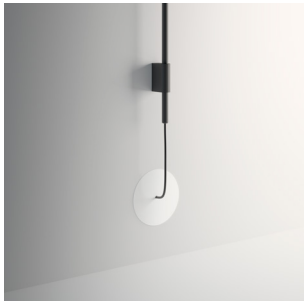


Ref.
 5757, 5759, 5761, 5763, 5765, 5767.
 Recessed dimmable driver.



Ref.
 5756, 5758, 5760, 5762, 5764, 5766.
 Push dimmer on the cable.
 With plug.


5756

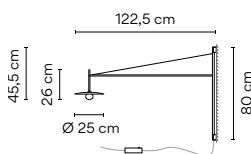

Finishes	LED temperature colour	Control
<ul style="list-style-type: none"> ● 18/ __ Graphite (ADAPTA RF9913WX) ● 37/ __ Terra Red (NCS S 4040-Y70R) ● 58/ __ Cream (RAL 7044) ● 62/ __ Green (NCS S 3010-G20Y) 	/1_ 2700 K CRI >90 415 lm 104 lm/W	5756 __ / _ 5 Push

Materials	Packaging
Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum.	2 Boxes Total Vol 0,082 m ³ Gross weight 4,3 Kg Net weight 2,5 Kg
Light Source and electronics	Notes
1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Push dimmer on the cable. With plug (4 m)


5757

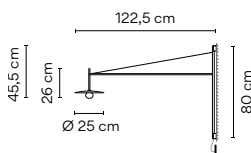

Finishes	LED temperature colour	Control
<ul style="list-style-type: none"> ● 18/ __ Graphite (ADAPTA RF9913WX) ● 37/ __ Terra Red (NCS S 4040-Y70R) ● 58/ __ Cream (RAL 7044) ● 62/ __ Green (NCS S 3010-G20Y) 	/1_ 2700 K CRI >90 415 lm 104 lm/W	5757 __ / _ 1 DALI-2 5757 __ / _ B 1-10V, Push 5757 __ / _ Z Casambi

Materials	Packaging
Diffuser: Blown-glass. LED support: Aluminum. Structures: Steel. Shade: Aluminum.	2 Boxes Total Vol 0,082 m ³ Gross weight 4,3 Kg Net weight 2,5 Kg
Light Source and electronics	Notes
1 x LED 4 W 350 mA Constant Current 350 mA 220~240V 50/60Hz	Recessed dimmable driver (2,5 m)
ø 7,5 cm	

5758



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5758 __ / _ 5
Push

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes
Push dimmer on the cable. With plug (4 m).



5759



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5759 __ / _ 1
DALI-2

5759 __ / _ B
1-10V, Push

5759 __ / _ Z
Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,5 Kg Net weight 1,7 Kg

Notes
Recessed dimmable driver (2,5 m)



5760



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5760 __ / _ 5
Push

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes
Push dimmer on the cable. With plug (4 m)



5761



- Finishes**
- **18/** __ Graphite (ADAPTA RF9913WX)
 - **37/** __ Terra Red (NCS S 4040-Y70R)
 - **58/** __ Cream (RAL 7044)
 - **62/** __ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5761 __ / _ 1
DALI-2

5761 __ / _ B
1-10V, Push

5761 __ / _ Z
Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging
2 Boxes
Total Vol 0,088 m³
Gross weight 3,7 Kg Net weight 1,9 Kg

Notes
Recessed dimmable driver (2,5 m)



5762

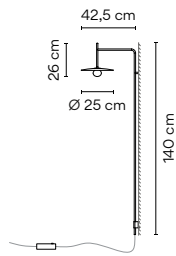

- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5762 _ _ / _ 5
 Push

Materials
 Diffuser: Blown-glass. LED support: Aluminum.
 Structures: Steel. Shade: Aluminum


Packaging
 2 Boxes
 Total Vol 0,088 m³
 Gross weight 3,2 Kg Net weight 2 Kg

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Notes
 Push dimmer on the cable. With plug (4 m)



5763

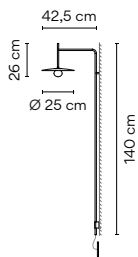

- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5763 _ _ / _ 1
 DALI-2

Materials
 Diffuser: Blown-glass. LED support: Aluminum.
 Structures: Steel. Shade: Aluminum


Packaging
 2 Boxes
 Total Vol 0,088 m³
 Gross weight 3,2 Kg Net weight 2 Kg

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Notes
 Recessed dimmable driver (2,5 m)



5764

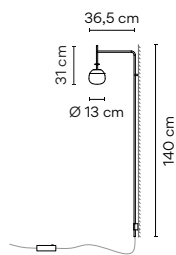

- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5764 _ _ / _ 5
 Push

Materials
 Diffuser: Blown-glass. LED support: Aluminum.
 Structures: Steel.


Packaging
 2 Boxes
 Total Vol 0,088 m³
 Gross weight 2,45 Kg Net weight 1,25 Kg

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Notes
 Push dimmer on the cable. With plug (4 m)



5765

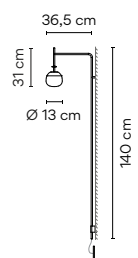

- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5765 _ _ / _ 1
 DALI-2

Materials
 Diffuser: Blown-glass. LED support: Aluminum.
 Structures: Steel.


Packaging
 2 Boxes
 Total Vol 0,088 m³
 Gross weight 2,45 Kg Net weight 1,25 Kg

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Notes
 Recessed dimmable driver (2,5 m)



5766



- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5766 _ _ / _ 5
Push

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Light Source and electronics


1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Notes

Push dimmer on the cable. With plug (4 m)



5767

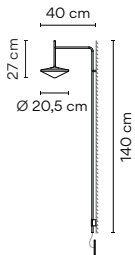

- Finishes**
- 18/ _ _ Graphite (ADAPTA RF9913WX)
 - 37/ _ _ Terra Red (NCS S 4040-Y70R)
 - 58/ _ _ Cream (RAL 7044)
 - 62/ _ _ Green (NCS S 3010-G20Y)
- LED temperature colour**
- /1_ 2700 K CRI >90 415 lm 104 lm/W

Control

5767 _ _ / _ 1
DALI-2

5767 _ _ / _ B
1-10V, Push

5767 _ _ / _ Z
Casambi

Materials

Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel.

Packaging

2 Boxes
Total Vol 0,088 m³
Gross weight 2,65 Kg Net weight 1,45 Kg

Light Source and electronics

1 x LED 4 W 350 mA
Constant Current 350 mA
220~240V 50/60Hz

Notes

Recessed dimmable driver (2,5 cm)



Pendants



ø 25 cm

5770




ø 13 cm

5772



ø 20,5 cm

5774

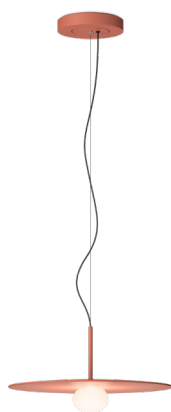


ø 40 cm

5776



ø 24 cm


5778

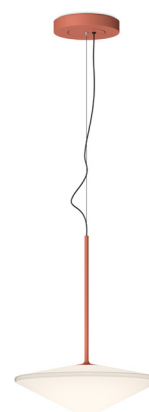

ø 34,5 cm

5780

5770



- | | |
|---|---|
| Finishes | LED temperature colour |
| ● 18/ __ Graphite (ADAPTA RF9913WX) | /1 2700 K CRI >90 415 lm 104 lm/W |
| ● 37/ __ Terra Red (NCS S 4040-Y70R) | |
| ● 58/ __ Cream (RAL 7044) | |
| ● 62/ __ Green (NCS S 3010-G20Y) | |

Materials
 Diffuser: Blown-glass. LED support: Aluminum.
 Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Control
5770 __ / __ 1
 DALI-2

5770 __ / __ B
 1-10V, Push

5770 __ / __ Z
 Casambi


Packaging
 1 Box 0,28 x 0,26 x 0,13 m
 Vol 0,01 m³
 Gross weight 2,5 Kg Net weight 2 Kg

Notes
 Extra cable length.



Electrical connection
 Surface
 _18 Free Wire
 _23 Built-in
 _31 Remote
 Micro for plaster ceilings
 _32 Remote
 XXS for all types of drop ceilings

5772



- | | |
|---|---|
| Finishes | LED temperature colour |
| ● 18/ __ Graphite (ADAPTA RF9913WX) | /1 2700 K CRI >90 415 lm 104 lm/W |
| ● 37/ __ Terra Red (NCS S 4040-Y70R) | |
| ● 58/ __ Cream (RAL 7044) | |
| ● 62/ __ Green (NCS S 3010-G20Y) | |

Materials
 Diffuser: Blown-glass. LED support: Aluminum.
 Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Control
5772 __ / __ 1
 DALI-2

5772 __ / __ B
 1-10V, Push

5772 __ / __ Z
 Casambi


Packaging
 1 Box 0,28 x 0,2 x 0,27 m
 Vol 0,015 m³
 Gross weight 1,8 Kg Net weight 1,2 Kg

Notes
 Extra cable length.



Electrical connection
 Surface
 _18 Free Wire
 _23 Built-in
 _31 Remote
 Micro for plaster ceilings
 _32 Remote
 XXS for all types of drop ceilings

5774



- | | |
|---|---|
| Finishes | LED temperature colour |
| ● 18/ __ Graphite (ADAPTA RF9913WX) | /1 2700 K CRI >90 415 lm 104 lm/W |
| ● 37/ __ Terra Red (NCS S 4040-Y70R) | |
| ● 58/ __ Cream (RAL 7044) | |
| ● 62/ __ Green (NCS S 3010-G20Y) | |

Materials
 Diffuser: Blown-glass. LED support: Aluminum.
 Structures: Steel. Shade: Aluminum. Canopy: Steel.

Light Source and electronics
 1 x LED 4 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Control
5774 __ / __ 1
 DALI-2

5774 __ / __ B
 1-10V, Push

5774 __ / __ Z
 Casambi


Packaging
 1 Box 0,28 x 0,2 x 0,27 m
 Vol 0,015 m³
 Gross weight 2 Kg Net weight 1,4 Kg

Notes
 Extra cable length.



Electrical connection
 Surface
 _18 Free Wire
 _23 Built-in
 _31 Remote
 Micro for plaster ceilings
 _32 Remote
 XXS for all types of drop ceilings

5776



Finishes	LED temperature colour
● 18/ __ Graphite (ADAPTA RF9913WX)	/1_ 2700 K CRI >90 415 lm 104 lm/W
● 37/ __ Terra Red (NCS S 4040-Y70R)	
● 58/ __ Cream (RAL 7044)	
● 62/ __ Green (NCS S 3010-G20Y)	

Control
5776 __ / _ 1 DALI-2
5776 __ / _ B 1-10V, Push
5776 __ / _ Z Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum. Canopy: Steel.


Packaging
1 Box 0,45 x 0,45 x 0,12 m
Vol 0,023 m³
Gross weight 5,5 Kg Net weight 4 Kg

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

5778

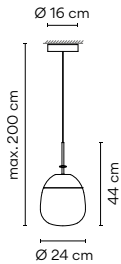

Finishes	LED temperature colour
● 18/ __ Graphite (ADAPTA RF9913WX)	/1_ 2700 K CRI >90 415 lm 104 lm/W
● 37/ __ Terra Red (NCS S 4040-Y70R)	
● 58/ __ Cream (RAL 7044)	
● 62/ __ Green (NCS S 3010-G20Y)	

Control
5778 __ / _ 1 DALI-2
5778 __ / _ B 1-10V, Push
5778 __ / _ Z Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structure: Steel. Canopy: Steel.


Packaging
1 Box 0,33 x 0,33 x 0,42 m
Vol 0,045 m³
Gross weight 4 Kg Net weight 2,5 Kg

Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Notes
Extra cable length.

LED IP20 CE EAC Bi-volt

5780



Finishes	LED temperature colour
● 18/ __ Graphite (ADAPTA RF9913WX)	/1_ 2700 K CRI >90 415 lm 104 lm/W
● 37/ __ Terra Red (NCS S 4040-Y70R)	
● 58/ __ Cream (RAL 7044)	
● 62/ __ Green (NCS S 3010-G20Y)	

Control
5780 __ / _ 1 DALI-2
5780 __ / _ B 1-10V, Push
5780 __ / _ Z Casambi

Materials
Diffuser: Blown-glass. LED support: Aluminum.
Structures: Steel. Shade: Aluminum. Canopy: Steel.

Packaging
1 Box 0,41 x 0,41 x 0,23 m
Vol 0,038 m³
Gross weight 4 Kg Net weight 2,5 Kg


Light Source and electronics
1 x LED 4 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Notes
Extra cable length.


LED IP20 CE EAC Bi-volt

Composing pendants


Next sketches are composed by one or more compositions

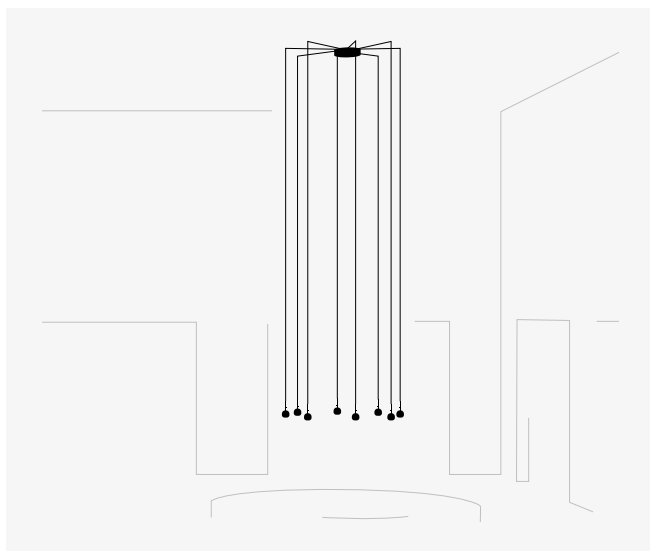

8 x 5772.

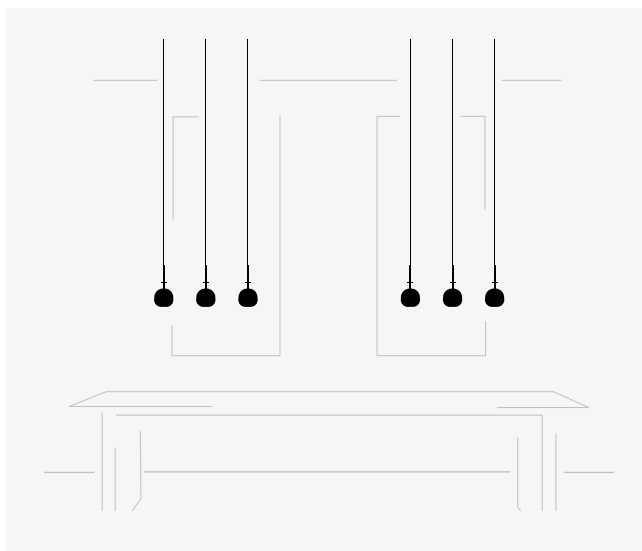

6 x 5772.

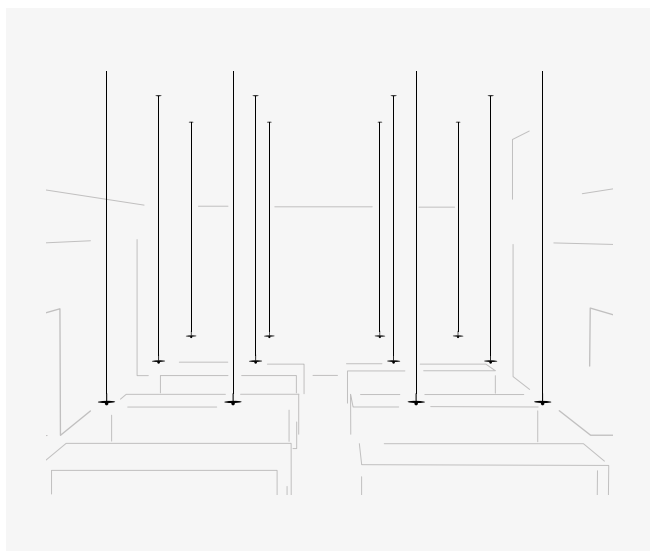

12 x 5770.

Each project is unique.
Visit vibia.com and
choose among multiple
compositions designed
and adapted to your
project needs.

Personalise your own
Tempo composition quick
and easy at vibia.com



Electrical connection options for models 5770 / 5772 / 5774


Choose your preferred installation option
according to your needs.
For each composition, the optimal minimum
number of drivers will be delivered.

Drop ceiling



The innovative remote and built-in fittings accentuate
the silkiness and lightness of compositions on
suspended ceilings, its great visual grandeur taking
center stage.

For Ref. 5770 / 5772 / 5774

Remote



Micro \varnothing 3 cm
height 7 cm
for plaster ceilings.
Black finish.




XXS \varnothing 6 cm
height 6 cm
for all types of drop
ceilings. Match with
fixture finish.

Built-in



\varnothing 8 cm
height 6 cm
match with
fixture finish.



Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5770 / 5772 / 5774


Surface




ø 16 cm

match with
fixture finish.


Free Wire



1 wire



2 - 6 wires



7 - 9 wires

ø 20 cm

ø 36 cm

ø 40 cm

you can choose the finish of the canopy
among black, white or any colour
matching one of the pendants.

