

North

Design by Arik Levy

North, south, east and west are our points of references in space; we set-out, build and travel according to these coordinates.

Floor




max. 250 cm x max. 210 cm x max. 355 cm

5600



max. 270 cm x max. 270 cm x max. 355 cm

5605

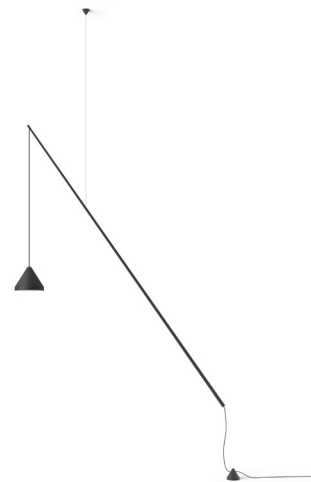

max. 210 cm x max. 310 cm x max. 130 cm

5666



max. 447 cm x max. 325 cm x max. 425 cm


5620



max. 270 cm x max. 270 cm x max. 355 cm

5625

5600



Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500 N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 42 / __ Blue M1 (NCS S 5010-B10G)

LED temperature colour

/1_ 2700 K CRI >90 2538,0 lm 141 lm/W

Control

5600 __ / _ 5
Push

Materials

Rods: Carbon fiber. Shade: Aluminum
 Diffuser: Methacrylate. Base: Steel.

Light Source and electronics

2 x LED 9 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Packaging

10 Boxes
 Total Vol 0,37 m³
 Gross weight 92,05 Kg Net weight 79,95 Kg


Notes

Can be connected with or without plug.
 Electric cable 2,5 m.

UNTIL STOCK RUNS OUT



5605



Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500 N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 42 / __ Blue M1 (NCS S 5010-B10G)

LED temperature colour

/1_ 2700 K CRI >90 2538,0 lm 141 lm/W

Control

5605 __ / _ 5
Push

Materials

Rods: Carbon fiber. Shade: Aluminum
 Diffuser: Methacrylate. Base: Steel.

Light Source and electronics

2 x LED 9 W 350 mA
 Constant Current 350 mA
 220~240V 50/60Hz

Packaging


10 Boxes
 Total Vol 0,35 m³
 Gross weight 91 Kg Net weight 79,8 Kg

Notes

Can be connected with or without plug.
 Electric cable 2,5 m



5620



Finishes

- 10/ __ White (NCS S 0300-N)
- 11/ __ Black (NCS S 8500 N)
- 24/ __ Beige M1 (NCS S 2005-Y50R)
- 42 / __ Blue M1 (NCS S 5010-B10G)

LED temperature colour

/1_ 2700 K CRI >90 3807 lm 141 lm/W

Control

5620 __ / _ 5
Push

Materials

Rods: Carbon fiber. Shade: Aluminum
 Diffuser: Methacrylate. Base: Steel.

Light Source and electronics

3 x LED 9W 350mA
 Constant Current 350 mA
 220~240V 50/60Hz

Packaging


12 Boxes
 Total Vol 0,36 m³
 Gross weight 94,85 Kg Net weight 81,25 Kg

Notes

Can be connected with or without plug.
 Electric cable 2,5 m



5625



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500 N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 42 / __ Blue M1 (NCS S 5010-B10G)

LED temperature colour

/1 _ 2700 K CRI >90 5076 lm 141 lm/W

Control

5625 __ / _ 5
Push

Materials

Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Base: Steel.

Light Source and electronics

4 x LED 9W 350mA
Constant Current 350 mA
220-240V 50/60Hz

Packaging

14 Boxes
Total Vol 0,47 m³
Gross weight 101,20 Kg Net weight 83,55 Kg


Notes

Can be connected with or without plug.
Electric cable 2,5 m.

UNTIL STOCK RUNS OUT



5666



- Finishes**
- 10/ __ White (NCS S 0300-N)
 - 11/ __ Black (NCS S 8500 N)
 - 24/ __ Beige M1 (NCS S 2005-Y50R)
 - 42 / __ Blue M1 (NCS S 5010-B10G)

LED temperature colour

/1 _ 2700 K CRI >90 1269,0 lm 141 lm/W

/2 _ 3000 K CRI >80 1123 lm 125 lm/W

/3 _ 3500 K CRI >90 1374,9 lm 152,8 lm/W

Control

5666 __ / _ 5
Push

Materials

Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Counterweight: Aluminum

Light Source and electronics


1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes 0,24 x 0,217 x 0,21 m
Total Vol 0,0464 m³
Gross weight 6,2 Kg Net weight 4,05 Kg

Notes

Electric cable with plug.
Electric cable 2,5 m
Extra cable length.



Dimmer **Bi-volt**



Height-adjustable shade.



Adjustable-angle rods.
Can be connected with or without plug.



North

Wall



5630



5635



ø 16 cm

5640



ø 40 cm


5642



ø 60 cm

5644

5630



- | | |
|--|-------------------------------|
| Finishes | LED temperature colour |
| ● 10/ __ White
(NCS S 0300-N) | /1 _ 2700 K |
| ● 11/ __ Black
(NCS S 8500 N) | CRI >90 1269,0 lm 141 lm/W |
| ● 24/ __ Beige M1
(NCS S 2005-Y50R) | /2 _ 3000 K |
| ● 42 / __ Blue M1
(NCS S 5010-B10G) | CRI >80 1123 lm 125 lm/W |
| | /3 _ 3500 K |
| | CRI >90 1374,9 lm 152,8 lm/W |

Materials
 Rods: Carbon fiber. Shade: Aluminum
 Diffuser: Methacrylate. Wall Plate: Steel.

Light Source and electronics
 1 x LED 9 W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz


Control
 5630 __ / _ 5
 Push

Packaging
 3 Boxes
 Total Vol 0,24 m³
 Gross weight 11,05 Kg Net weight 5,85 Kg

Notes
 Push-button on the wall plate.
 Can be connected with or without plug.
 Electric cable 2,5 m



5635



- | | |
|--|-------------------------------|
| Finishes | LED temperature colour |
| ● 10/ __ White
(NCS S 0300-N) | /1 _ 2700 K |
| ● 11/ __ Black
(NCS S 8500 N) | CRI >90 2538,0 lm 141 lm/W |
| ● 24/ __ Beige M1
(NCS S 2005-Y50R) | /2 _ 3000 K |
| ● 42 / __ Blue M1
(NCS S 5010-B10G) | CRI >80 2246 lm 125 lm/W |
| | /3 _ 3500 K |
| | CRI >90 2749,8 lm 152,8 lm/W |

Materials
 Rods: Carbon fiber. Shade: Aluminum
 Diffuser: Methacrylate. Wall Plate: Steel.

Light Source and electronics
 2 x LED 9 W 350 mA
 Constant Current 350 mA
 220-240V 50/60Hz

Control
 5635 __ / _ 5
 Push


Packaging
 4 Boxes
 Total Vol 0,18 m³
 Gross weight 14,6 Kg Net weight 7,3 Kg

Notes
 Push-button on the wall plate.
 Can be connected with or without plug.
 Electric cable 2,5 m.

UNTIL STOCK RUNS OUT



5640



- | | |
|--|-------------------------------|
| Finishes | LED temperature colour |
| ● 10/ __ White
(NCS S 0300-N) | /1 _ 2700 K |
| ● 11/ __ Black
(NCS S 8500 N) | CRI >90 1269 lm 141 lm/W |
| ● 24/ __ Beige M1
(NCS S 2005-Y50R) | |
| ● 42 / __ Blue M1
(NCS S 5010-B10G) | |

Materials
 Diffuser: Methacrylate. Shade: Aluminum.
 Wall Plate: Steel.


Light Source and electronics
 1 x LED 9W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Control
 5640 __ / _ 5
 Push


Packaging
 2 Boxes
 Total Vol 0,04 m³
 Gross weight 5,2 Kg Net weight 2,75 Kg


Notes
 Push-button on the wall plate.
 Can be connected with or without plug.
 Electric cable 2,5 m.

UNTIL STOCK RUNS OUT



5642



Finishes	LED temperature colour
<ul style="list-style-type: none"> ● 10/ __ White (NCS S 0300-N) ● 11/ __ Black (NCS S 8500 N) ● 24/ __ Beige M1 (NCS S 2005-Y50R) ● 42 / __ Blue M1 (NCS S 5010-B10G) 	/1_ 2700 K  CRI >90 1269 lm 141 lm/W

Control
5642 __ / __ 5
 Push

Materials
 Diffuser: Methacrylate. Shade: Aluminum.
 Wall Plate: Steel.

Light Source and electronics
 1 x LED 9W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz


Packaging
 2 Boxes
 Total Vol 0,12 m³
 Gross weight 7,7 Kg Net weight 3,75 Kg


Notes
 Push-button on the wall plate.
 Length of light electric cable 10 m.
 Can be connected with or without plug.
 Electric cable 2,5 m.

UNTIL STOCK RUNS OUT



5644



Finishes	LED temperature colour
<ul style="list-style-type: none"> ● 10/ __ White (NCS S 0300-N) ● 11/ __ Black (NCS S 8500 N) ● 24/ __ Beige M1 (NCS S 2005-Y50R) ● 42 / __ Blue M1 (NCS S 5010-B10G) 	/1_ 2700 K  CRI >90 1269 lm 141 lm/W

Control
5644 __ / __ 5
 Push

Materials
 Diffuser: Methacrylate. Shade: Aluminum.
 Wall Plate: Steel.

Light Source and electronics
 1 x LED 9W 350 mA
 Constant Current 350 mA
 110-240V 50/60Hz

Packaging
 2 Boxes
 Total Vol 0,20 m³
 Gross weight 9,15 Kg Net weight 4,45 Kg

Notes
 Push-button on the wall plate.
 Length of light electric cable 10 m.
 Can be connected with or without plug.
 Electric cable 2,5 m.

UNTIL STOCK RUNS OUT



Height-adjustable shade.



Can be connected with or without plug.




Pendants



ø 16 cm

5660




ø 40 cm

5662




ø 60 cm

5664

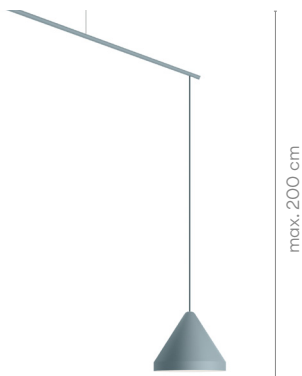


ø 16 cm

5670

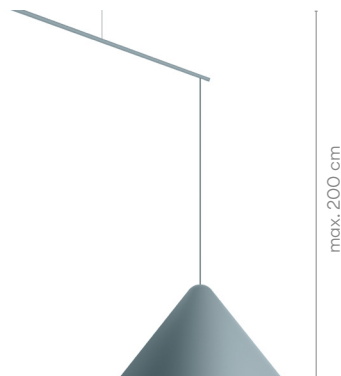

ø 40 cm

5672

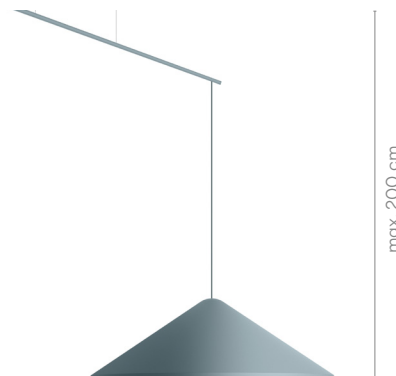


ø 60 cm

5674



Height-adjustable shade.

5660



Finishes	LED temperature colour
● 10/ __ White (NCS S 0300-N)	/1 _ 2700 K
● 11/ __ Black (NCS S 8500 N)	/2 _ 3000 K
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/3 _ 3500 K
● 42 / __ Blue M1 (NCS S 5010-B10G)	

Finish customization
(Available options:
Vibia colour palette)

Materials

Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Control

5660 __ / _ 1
DALI-2

5660 __ / _ B
1-10V, Push

5660 __ / _ Z
Casambi

Packaging

1 Box 0,24 x 0,217 x 0,217 m
Vol 0,01 m³
Gross weight 2,3 Kg Net weight 1,25 Kg

Notes


Extra cable length.



Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro for plaster ceilings
_32 Remote XXS for all types of drop ceilings

5662



Finishes	LED temperature colour
● 10/ __ White (NCS S 0300-N)	/1 _ 2700 K
● 11/ __ Black (NCS S 8500 N)	/2 _ 3000 K
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/3 _ 3500 K
● 42 / __ Blue M1 (NCS S 5010-B10G)	

Finish customization
(Available options:
Vibia colour palette)

Materials

Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
220-240V 50/60Hz

Control

5662 __ / _ 1
DALI-2

5662 __ / _ B
1-10V, Push

5662 __ / _ Z
Casambi

Packaging

1 Box 0,36 x 0,537 x 0,537 m
Vol 0,10 m³
Gross weight 4,8 Kg Net weight 2,25 Kg

Notes


Extra cable length.



Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro for plaster ceilings
_32 Remote XXS for all types of drop ceilings

5664



Finishes	LED temperature colour
● 10/ __ White (NCS S 0300-N)	/1 _ 2700 K
● 11/ __ Black (NCS S 8500 N)	/2 _ 3000 K
● 24/ __ Beige M1 (NCS S 2005-Y50R)	/3 _ 3500 K
● 42 / __ Blue M1 (NCS S 5010-B10G)	

Finish customization
(Available options:
Vibia colour palette)

Materials

Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Control

5664 __ / _ 1
DALI-2

5664 __ / _ B
1-10V, Push

5664 __ / _ Z
Casambi

Packaging

1 Box 0,32 x 0,727 x 0,727 m
Vol 0,17 m³
Gross weight 6,25 Kg Net weight 2,95 Kg

Notes


Extra cable length.



Electrical connection

Surface
_18 Free Wire
_23 Built-in
_31 Remote Micro for plaster ceilings
_32 Remote XXS for all types of drop ceilings

5670



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour

- /1_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2_ 3000 K CRI >80 1123 lm 125 lm/W
- /3_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

Control

- 5670 _ _ / _ 1 DALI-2
- 5670 _ _ / _ B 1-10V, Push
- 5670 _ _ / _ Z Casambi

Materials

Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,06 m³
Gross weight 5,75 Kg Net weight 2 Kg

Notes

Extra cable length.



5672



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour

- /1_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2_ 3000 K CRI >80 1123 lm 125 lm/W
- /3_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

Control

- 5672 _ _ / _ 1 DALI-2
- 5672 _ _ / _ B 1-10V, Push
- 5672 _ _ / _ Z Casambi

Materials

Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging


2 Boxes
Total Vol 0,14 m³
Gross weight 8,25 Kg Net weight 3 Kg

Notes

Extra cable length.



5674



Finishes

- 10/ _ _ White (NCS S 0300-N)
- 11/ _ _ Black (NCS S 8500 N)
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 42 / _ _ Blue M1 (NCS S 5010-B10G)

LED temperature colour

- /1_ 2700 K CRI >90 1269,0 lm 141 lm/W
- /2_ 3000 K CRI >80 1123 lm 125 lm/W
- /3_ 3500 K CRI >90 1374,9 lm 152,8 lm/W

Control

- 5674 _ _ / _ 1 DALI-2
- 5674 _ _ / _ B 1-10V, Push
- 5674 _ _ / _ Z Casambi

Materials

Rods: Carbon fiber. Shade: Aluminum
Diffuser: Methacrylate. Canopy: Steel.

Light Source and electronics

1 x LED 9 W 350 mA
Constant Current 350 mA
110-240V 50/60Hz

Packaging

2 Boxes
Total Vol 0,21 m³
Gross weight 9,7 Kg Net weight 3,7 Kg


Notes

Extra cable length.




Composing pendants


Next sketches are composed by one or more compositions

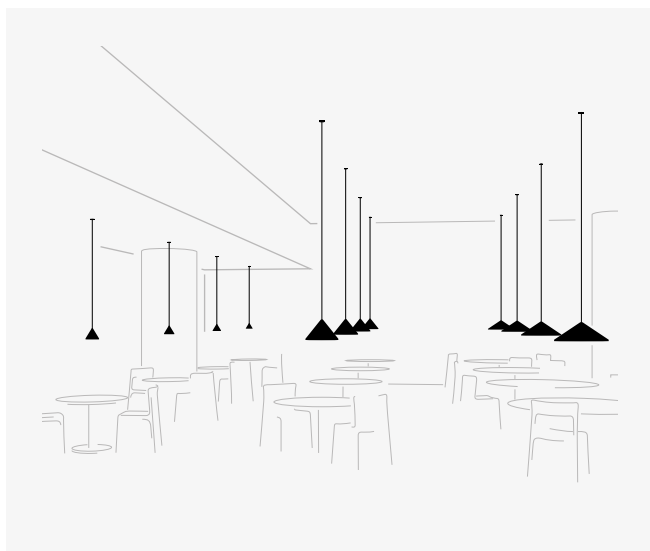

4 x 5660.
4 x 5662.
4 x 5664.

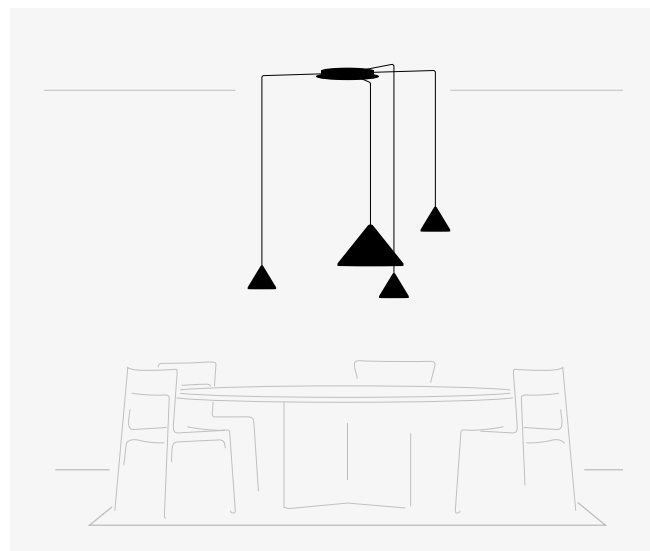

1 x 5664.
3 x 5660.

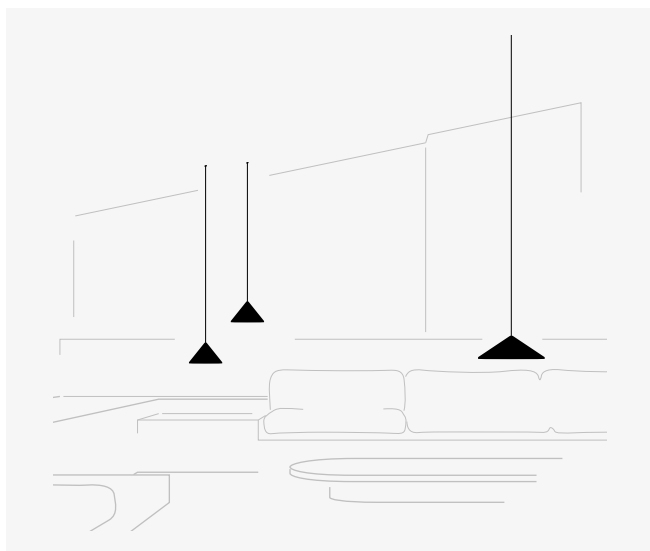

2 x 5662.
1 x 5664.

Each project is unique.
Visit vibia.com and
chose among multiple
compositions designed
and adapted to your
project needs.

Personalise your own
North composition quick
and easy at vibia.com

Electrical connection options for models 5660 / 5662 / 5664


Choose your preferred installation option
according to your needs.
For each composition, the optimal minimum
number of drivers will be delivered.

Drop ceiling



The innovative remote and built-in fittings accentuate
the silkiness and lightness of compositions on
suspended ceilings, its great visual grandeur taking
center stage.

For Ref. 5660 / 5662 / 5664

Remote



Micro ø 3 cm
height 7 cm
for plaster ceilings.
Black finish.




XXS ø 6 cm
height 6 cm
for all types of drop
ceilings. Match with
fixture finish.



Built-in



ø 8 cm
height 6 cm
match with
fixture finish.




Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5660 / 5662 / 5664


Surface




ø 18 cm

match with
fixture finish.


Free Wire




1 wire



2 wires



3 - 6 wires



7 - 8 wires

ø 20 cm

ø 22 cm

ø 36 cm

ø 40 cm

you can choose the finish of the canopy
among black, white or any colour
matching one of the pendants.

