

Puck Wall Art

Design by Jordi Vilardell

Puck Wall Art is comprised of different disks to create a warm, visually sharp and mathematically creative effect. There are four sizes of disks, allowing the designer to play with varied combinations of indirect light. The resulting design comprises a set of highly dynamic, sculptural compositions.

Wall



ø 30 cm

5470




ø 40 cm

5471




ø 45 cm

5472




ø 46 cm

5474




ø 60 cm

5476




58 cm

5480



69 cm

5481




68 cm

5485




87 cm

5487

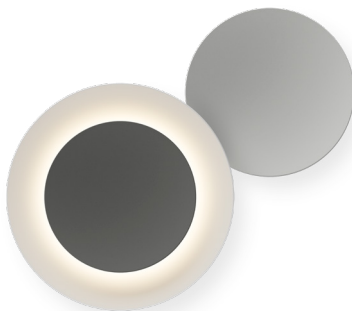

87 cm


5486

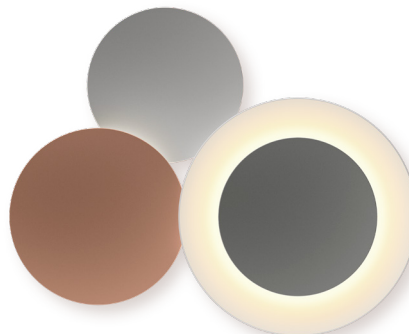


103 cm

5491

Each project is unique.
 Personalise your own
 Puck Wall Art composition
 quick and easy.

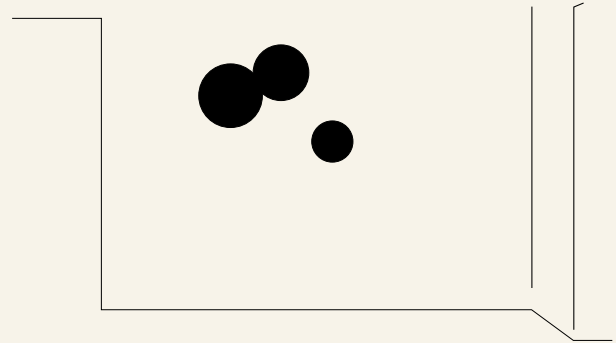

5470



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 952,5 lm 113 lm/W	5470 __ / _ 1 DALI-2
● 21/ __ Black Grey (NCS S 7000-N)	/3_ 3500 K CRI >90 1017,4 lm 121,1 lm/W	5470 __ / _ 3 1-10V
● 28/ __ Brown M1 (NCS S 4020-Y60R)		5470 __ / _ 4 Triac
		5470 __ / _ 5 Push
		5470 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 76/ __ Grey Felt L1	/1_ 2700 K CRI >90 952,5 lm 113 lm/W	5470 __ / _ 1 DALI-2
● 77/ __ Grey Felt D1	/3_ 3500 K CRI >90 1017,4 lm 121,1 lm/W	5470 __ / _ 3 1-10V
		5470 __ / _ 4 Triac
		5470 __ / _ 5 Push
		5470 __ / _ Z Casambi

Materials
 Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum.


Light Source and electronics
 1 x LED STRIP 8,4 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz

Packaging
 1 Box 0,34 x 0,34 x 0,23 m
 Vol 0,0266 m³
 Gross weight 2,6 Kg Net weight 1,6 Kg

Notes
 A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5471



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1 _ 2700 K CRI >90 1435,9 lm 114 lm/W	5471 __ / _ 1 DALI-2
● 21/ __ Black Grey (NCS S 7000-N)	/3 _ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5471 __ / _ 3 1-10V
● 28/ __ Brown M1 (NCS S 4020-Y60R)		5471 __ / _ 4 Triac
		5471 __ / _ 5 Push
		5471 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 76/ __ Grey Felt L1	/1 _ 2700 K CRI >90 1435,9 lm 114 lm/W	5471 __ / _ 1 DALI-2
● 77/ __ Grey Felt D1	/3 _ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5471 __ / _ 3 1-10V
		5471 __ / _ 4 Triac
		5471 __ / _ 5 Push
		5471 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging


1 Box 0,44 x 0,44 x 0,25 m
Vol 0,0484 m³
Gross weight 3,5 Kg Net weight 1,9 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5472



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5472 __ / _ 1 DALI-2
● 21/ __ Black Grey (NCS S 7000-N)	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5472 __ / _ 3 1-10V
● 28/ __ Brown M1 (NCS S 4020-Y60R)		5472 __ / _ 4 Triac
		5472 __ / _ 5 Push
		5471 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 76/ __ Grey Felt L1	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5472 __ / _ 1 DALI-2
● 77/ __ Grey Felt D1	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5472 __ / _ 3 1-10V
		5472 __ / _ 4 Triac
		5472 __ / _ 5 Push
		5472 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110-240V 50/60Hz Bi-volt
 / _ 3 110-240V 50/60Hz Bi-volt
 / _ 5 110-240V 50/60Hz Bi-volt
 / _ 4 220-240V 50/60Hz
 / _ Z 220-240V 50/60Hz

Packaging


1 Box 0,51 x 0,51 x 0,26 m
 Vol 0,0676 m³
 Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

5474



Finishes	LED temperature colour	Control
● 15/ _ _ Grey L2 (NCS S 2500-N)	/1 _ 2700 K CRI >90 952,5 lm 113 lm/W	5474 _ _ / _ 1 DALI-2
● 21/ _ _ Black Grey (NCS S 7000-N)	/3 _ 3500 K CRI >90 1017,4 lm 121,1 lm/W	5474 _ _ / _ 3 1-10V
● 28/ _ _ Brown M1 (NCS S 4020-Y6OR)		5474 _ _ / _ 4 Triac
		5474 _ _ / _ 5 Push
		5474 _ _ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ _ _ Grey Felt L1 & Grey Felt D1	/1 _ 2700 K CRI >90 952,5 lm 113 lm/W	5474 _ _ / _ 1 DALI-2
● 76/ _ _ Grey Felt L1	/3 _ 3500 K CRI >90 1017,4 lm 121,1 lm/W	5474 _ _ / _ 3 1-10V
		5474 _ _ / _ 4 Triac
		5474 _ _ / _ 5 Push
		5474 _ _ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz


Packaging

1 Box 0,51 x 0,51 x 0,26 m
Vol 0,0676 m³
Gross weight 4,75 Kg Net weight 2,25 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

5476



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5476 __ / _ 1 DALI-2
● 21/ __ Black Grey (NCS S 7000-N)	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5476 __ / _ 3 1-10V
● 28/ __ Brown M1 (NCS S 4020-Y60R)		5476 __ / _ 4 Triac
		5476 __ / _ 5 Push
		5476 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1_ 2700 K CRI >90 1435,9 lm 114 lm/W	5476 __ / _ 1 DALI-2
● 76/ __ Grey Felt L1	/3_ 3500 K CRI >90 1533,8 lm 121,7 lm/W	5476 __ / _ 3 1-10V
		5476 __ / _ 4 Triac
		5476 __ / _ 5 Push
		5476 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum. Ring: Steel.

Light Source and electronics

1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110-240V 50/60Hz Bi-volt
 / _ 3 110-240V 50/60Hz Bi-volt
 / _ 5 110-240V 50/60Hz Bi-volt
 / _ 4 220-240V 50/60Hz
 / _ Z 220-240V 50/60Hz

Packaging


1 Box 0,66 x 0,66 x 0,235 m
 Vol 0,1024 m³
 Gross weight 6,3 Kg Net weight 2,9 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system

LED IP20 CE EAC Bi-volt

5480



Finishes	LED temperature colour	Control
● 15/ _ _ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 2388,4 lm 114 lm/W	5480 _ _ / _ 1 DALI-2
● 28/ _ _ Brown M1 (NCS S 4020-Y60R)	/3_ 3500 K CRI >90 2551,3 lm 121,5 lm/W	5480 _ _ / _ 3 1-10V
● 72/ _ _ Grey D1 & Grey L2		5480 _ _ / _ 4 Triac
		5480 _ _ / _ 5 Push
		5480 _ _ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ _ _ Grey Felt L1 & Grey Felt D1	/1_ 2700 K CRI >90 2388,4 lm 114 lm/W	5480 _ _ / _ 1 DALI-2
● 76/ _ _ Grey Felt L1	/3_ 3500 K CRI >90 2551,3 lm 121,5 lm/W	5480 _ _ / _ 3 1-10V
		5480 _ _ / _ 4 Triac
		5480 _ _ / _ 5 Push
		5480 _ _ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum.

Light Source and electronics

1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging


1 Box 0,46 x 0,46 x 0,4 m
Vol 0,0846 m³
Gross weight 6,1 Kg Net weight 3,4 Kg

Notes

A maximum of 8 modules can be connected to a single connection point. For bigger compositions, check connection system



5481



Finishes	LED temperature colour	Control
● 15/ __ Grey L2 (NCS S 2500-N)	/1_ 2700 K CRI >90 2871,9 lm 114 lm/W	5481 __ / _ 1 DALI-2
● 28/ __ Brown M1 (NCS S 4020-Y60R)	/3_ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5481 __ / _ 3 1-10V
● 72/ __ Grey D1 & Grey L2		5481 __ / _ 4 Triac
		5481 __ / _ 5 Push
		5481 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1_ 2700 K CRI >90 2871,9 lm 114 lm/W	5481 __ / _ 1 DALI-2
● 76/ __ Grey Felt L1	/3_ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5481 __ / _ 3 1-10V
		5481 __ / _ 4 Triac
		5481 __ / _ 5 Push
		5481 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum.

Light Source and electronics


1 x LED STRIP 8,4 W 700 mA
 1 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA
 / _ 1 110~240V 50/60Hz Bi-volt
 / _ 3 110~240V 50/60Hz Bi-volt
 / _ 5 110~240V 50/60Hz Bi-volt
 / _ 4 220~240V 50/60Hz
 / _ Z 220~240V 50/60Hz

Packaging

1 Box 0,46 x 0,46 x 0,4 m
 Vol 0,0846 m³
 Gross weight 6,1 Kg Net weight 3,4 Kg



5485



Finishes	LED temperature colour	Control
● 72/ __ Grey D1 & Grey L2	/1 _ 2700 K CRI >90 2388,4 lm 114 lm/W	5485 __ / _ 1 DALI-2
● 73/ __ Brown M1 & Grey D1)	/3 _ 3500 K CRI >90 2551,3 lm 121,5 lm/W	5485 __ / _ 3 1-10V
		5485 __ / _ 4 Triac
		5485 __ / _ 5 Push
		5485 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1 _ 2700 K CRI >90 2388,4 lm 114 lm/W	5485 __ / _ 1 DALI-2
	/3 _ 3500 K CRI >90 2551,3 lm 121,5 lm/W	5485 __ / _ 3 1-10V
		5485 __ / _ 4 Triac
		5485 __ / _ 5 Push
		5485 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics


1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,51 x 0,51 x 0,43 m
Vol 0,1118 m³
Gross weight 8,42 Kg Net weight 4,22 Kg



5486



Finishes	LED temperature colour	Control
● 72/ __ Grey D1 & Grey L2	/1_ 2700 K CRI >90 2871,9 lm 114 lm/W	5486 __ / _ 1 DALI-2
● 73/ __ Brown M1 & Grey D1)	/3_ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5486 __ / _ 3 1-10V
		5486 __ / _ 4 Triac
		5486 __ / _ 5 Push
		5486 __ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ __ Grey Felt L1 & Grey Felt D1	/1_ 2700 K CRI >90 2871,9 lm 114 lm/W	5486 __ / _ 1 DALI-2
	/3_ 3500 K CRI >90 3067,7 lm 121,7 lm/W	5486 __ / _ 3 1-10V
		5486 __ / _ 4 Triac
		5486 __ / _ 5 Push
		5486 __ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum. Ring: Steel.

Light Source and electronics

2 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA


- / _ 1 110-240V 50/60Hz Bi-volt
- / _ 3 110-240V 50/60Hz Bi-volt
- / _ 5 110-240V 50/60Hz Bi-volt
- / _ 4 220-240V 50/60Hz
- / _ Z 220-240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
 Vol 0,2178 m³
 Gross weight 11,35 Kg Net weight 5,45 Kg



5487



Finishes	LED temperature colour	Control
● 21/ _ _ Black Grey (NCS S 7000-N)	/1_ 2700 K CRI >90 2388,4 lm 114 lm/W	5487 _ _ / _ 1 DALI-2
● 73/ _ _ Brown M1 & Grey D1	/3_ 3500 K CRI >90 2551,3 lm 121,5 lm/W	5487 _ _ / _ 3 1-10V
		5487 _ _ / _ 4 Triac
		5487 _ _ / _ 5 Push
		5487 _ _ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ _ _ Grey Felt L1 & Grey Felt D	/1_ 2700 K CRI >90 2388,4 lm 114 lm/W	5487 _ _ / _ 1 DALI-2
	/3_ 3500 K CRI >90 2551,3 lm 121,5 lm/W	5487 _ _ / _ 3 1-10V
		5487 _ _ / _ 4 Triac
		5487 _ _ / _ 5 Push
		5487 _ _ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
Wall support: Aluminum. Ring: Steel.

Light Source and electronics


1 x LED STRIP 8,4 W 700 mA
1 x LED STRIP 12,6 W 700 mA
Constant Current 700 mA
/ _ 1 110~240V 50/60Hz Bi-volt
/ _ 3 110~240V 50/60Hz Bi-volt
/ _ 5 110~240V 50/60Hz Bi-volt
/ _ 4 220~240V 50/60Hz
/ _ Z 220~240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,5 m
Vol 0,2178 m³
Gross weight 11,52 Kg Net weight 5,62 Kg



5491



Finishes	LED temperature colour	Control
● 72/ _ _ Grey D1 & Grey L2	/1 _ 2700 K CRI >90 4307,8 lm 114 lm/W	5491 _ _ / _ 1 DALI-2
● 73/ _ _ Brown M1 & Grey D1	/3 3500 K CRI >90 4601,5 lm 121,7 lm/W	5491 _ _ / _ 3 1-10V
		5491 _ _ / _ 4 Triac
		5491 _ _ / _ 5 Push
		5491 _ _ / _ Z Casambi

Finishes	LED temperature colour	Control
● 71/ _ _ Grey Felt L1 & Grey Felt D1	/1 _ 2700 K CRI >90 4307,8 lm 114 lm/W	5491 _ _ / _ 1 DALI-2
	/3 3500 K CRI >90 4601,5 lm 121,7 lm/W	5491 _ _ / _ 3 1-10V
		5491 _ _ / _ 4 Triac
		5491 _ _ / _ 5 Push
		5491 _ _ / _ Z Casambi

Materials

Diffuser: Polycarbonate. Shade: ABS.
 Wall support: Aluminum. Ring: Steel.

Light Source and electronics

3 x LED STRIP 12,6 W 700 mA
 Constant Current 700 mA

- / _ 1 110-240V 50/60Hz Bi-volt
- / _ 3 110-240V 50/60Hz Bi-volt
- / _ 5 110-240V 50/60Hz Bi-volt
- / _ 4 220-240V 50/60Hz
- / _ Z 220-240V 50/60Hz

Packaging

1 Box 0,66 x 0,66 x 0,67 m
 Vol 0,2919 m³
 Gross weight 14,85 Kg Net weight 7,35 Kg

