


brass-O

brass-O suspension lamp circle


BO.50.CI.BR 50cm brushed brass

Ø 50cm
Standard cable length **200cm**
Light source **integrated**
LED 30W / 2500K / 1200 lm
Net. weight **3kg**
Dimmable driver
Dimmer not included
IP 20

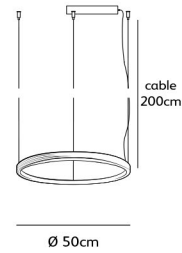


BO.70.CI.BR 70cm brushed brass

Ø 70cm
Standard cable length **200cm**
Light source **integrated**
LED 42W / 2500K / 1700 lm
Net. weight **4,5kg**
Dimmable driver
Dimmer not included
IP 20

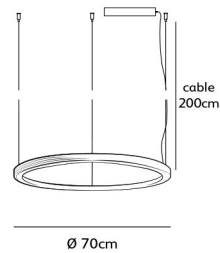


BO.100.CI.BR 100cm brushed brass

Ø 100cm
Standard cable length **200cm**
Light source **integrated**
LED 60W / 2500K / 2400 lm
Net. weight **6kg**
Dimmable driver
Dimmer not included
IP 20

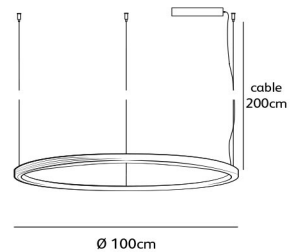

BO.135.CI.BR 135cm brushed brass

Ø 135cm
Standard cable length **200cm**
Light source **integrated**
LED 80W / 2500K / 3250 lm
Net. weight **8kg**
Dimmable driver
Dimmer not included
IP 20

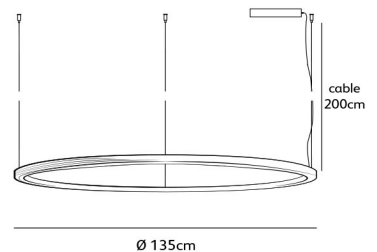


brass-O

brass-O driver & driver box options


Add the desired driver and driver box to your order. The standard white driver box and TRIAC driver will be added to your order if no driver box or driver is mentioned in your purchase order.

DRIVER.TRIAC	TRIAC driver
DRIVER.TYPE1	DALI/1-10V/0-10V/push on the mains driver
BO.DB.A.WH	brass-O driver box wxdxh = 24x8x4cm white (standard)
BO.DB.A.BL	brass-O driver box wxdxh = 24x8x4cm black
BO.DB.R.BL	brass-O driver box round Ø23cm x 5cm black
BO.DB.R.WH	brass-O driver box round Ø23cm x 5cm white
BO.DB.R.BR	brass-O driver box round Ø23cm x 5cm brushed brass

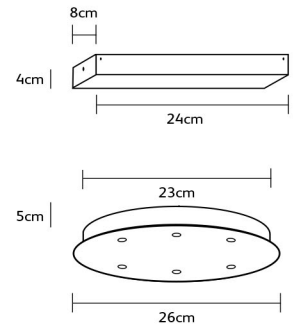


Note: driver box round is suitable for 2 fixtures maximum.

standard driver box

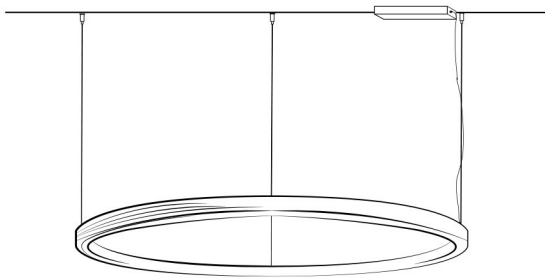

optional round driver box

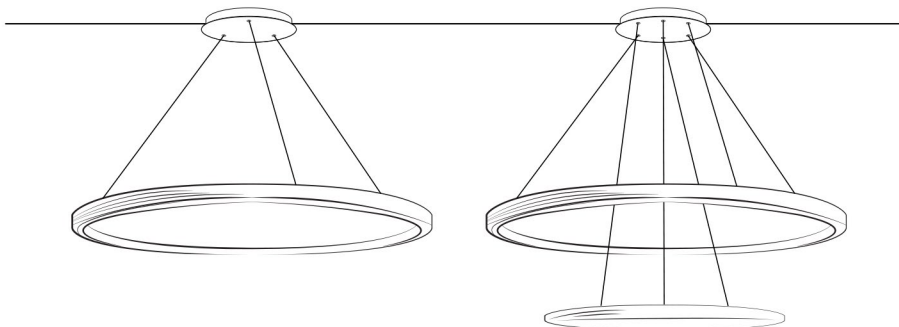


brass-O

brass-O suspension lamp circle vertical


BO.50.CI.VT.BR 50cm brushed brass

Ø 50cm
Standard cable length **200cm**
Light source **integrated**
LED 30W / 2500K / 1200 lm
Net. weight **3kg**
Dimmable driver
Dimmer not included
IP 20

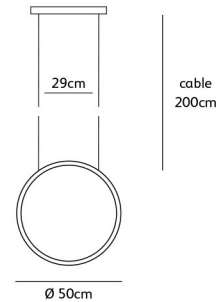


BO.70.CI.VT.BR 70cm brushed brass

Ø 70cm
Standard cable length **200cm**
Light source **integrated**
LED 42W / 2500K / 1700 lm
Net. weight **4,5kg**
Dimmable driver
Dimmer not included
IP 20

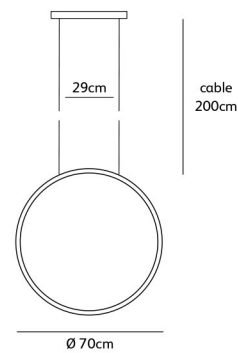

BO.100.CI.VT.BR 100cm brushed brass

Ø 100cm
Standard cable length **200cm**
Light source **integrated**
LED 60W / 2500K / 2400 lm
Net. weight **6kg**
Dimmable driver
Dimmer not included
IP 20

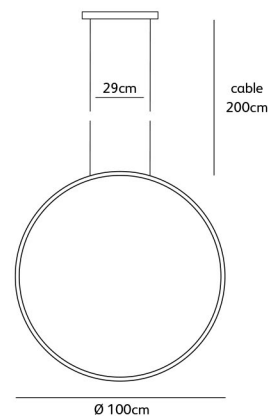


brass-O vertical driver & driver box options

Add the desired driver and driver box to your order. The standard white driver box and TRIAC driver will be added to your order if no driver box or driver is mentioned in your purchase order. If you have an ornamental ceiling, please contact us for special options.

DRIVER.TRIAC TRIAC driver, (phase cut)
DRIVER.TYPE3 DALI/push on the mains driver

BO.VT.DB.EG.BL brass-O vertical driver box wxdxh = 36x6x3,5cm black
BO.VT.DB.EG.WH brass-O vertical driver box wxdxh = 36x6x3,5cm white (standard)
BO.VT.DB.EG.BR brass-O vertical driver box wxdxh = 36x6x3,5cm brushed brass

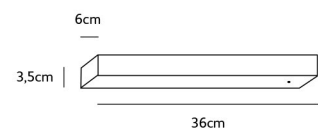


brass-O **NEW**

brass-O wall lamp circle **NEW**


BO.50.WA.CI.T2.BR 50cm brushed brass

Ø 50cm
Standard cable length **200cm**
Light source **integrated**
LED 30W / 2500K / 1200 lm
Net. weight **3kg**
Dimmable driver
Floor dimmer included
IP 20

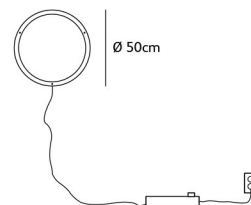


BO.70.WA.CI.T2.BR 70cm brushed brass

Ø 70cm
Standard cable length **200cm**
Light source **integrated**
LED 42W / 2500K / 1700 lm
Net. weight **4,5kg**
Dimmable driver
Floor dimmer included
IP 20



BO.100.WA.CI.T2.BR 100cm brushed brass

Ø 100cm
Standard cable length **200cm**
Light source **integrated**
LED 60W / 2500K / 2400 lm
Net. weight **6kg**
Dimmable driver
Floor dimmer included
IP 20



BO.135.WA.CI.T2.BR 135cm brushed brass

Ø 135cm
Standard cable length **200cm**
Light source **integrated**
LED 80W / 2500K / 3250 lm
Net. weight **8kg**
Dimmable driver
Floor dimmer included
IP 20

