

Flat

Design by Ichiro Iwasaki

Flat's distinctive, disc-shaped diffusers form horizontal planes of light that integrate with the surrounding architecture. A study in geometry, the collection creates layers of light that infuse a space with a soothing, Zen sensitivity.

Ceiling



ø 40 cm

5920



ø 55 cm

5915




ø 90 cm

5926




101 x 88 cm

5905

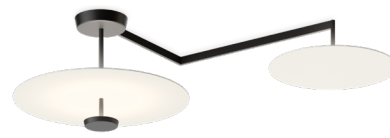

106 x 90 cm

5910

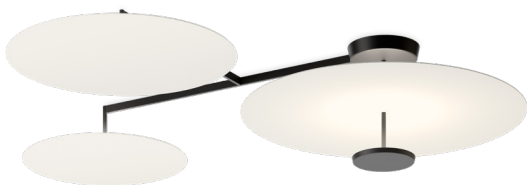

178 x 149 cm


5922



186 x 149 cm

5924

5905



Finishes

- 10/ __ White (NCS S 0300-N)
- 71/ __ White, Green L1, Off-white (NCS S 0300-N, NCS S 4005-G80Y, NCS S 1000-N)

LED temperature colour

- /1 _ 2700 K **E** CRI >90 5906,88 lm 109 lm/W
- /3 _ 3500 K **F** CRI >90 6344,4 lm 117,5 lm/W

Control

5905 __ / __ A
 DALI-2, 1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics

4 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,75 x 0,45 x 0,25 m
 Vol 0,0844 m³
 Gross weight 17,15 Kg Net weight 15,38 Kg

Notes

* Electrical connection point



5910



Finishes

- 10/ __ White (NCS S 0300-N)
- 72/ __ White, Green L1 (NCS S 0300-N, NCS S 4005-G80Y)
- 73/ __ White, Grey L1 (S 0300-N, NCS S 1000-N)

LED temperature colour

- /1 _ 2700 K **E** CRI >90 4430,16 lm 109 lm/W
- /3 _ 3500 K **F** CRI >90 4758,3 lm 117,5 lm/W

Control

5910 __ / __ A
 DALI-2, 1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics

3 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,80 x 0,70 x 0,30 m
 Vol 0,1680 m³
 Gross weight 11,90 Kg Net weight 9,10 Kg

Notes

* Electrical connection point



5915



Finishes

- 10/ __ White (NCS S 0300-N)

LED temperature colour

- /1 _ 2700 K **E** CRI >90 2953,44 lm 109 lm/W
- /3 _ 3500 K **F** CRI >90 3172,2 lm 117,5 lm/W

Control

5915 __ / __ A
 DALI-2, 1-10V, Push

Materials

Shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics

2 x LED PLATE 13,5 W 700 mA
 Constant Current 700 mA
 110-240V 50/60Hz

Packaging


1 Box 0,65 x 0,65 x 0,25 m
 Vol 0,0106 m³
 Gross weight 6,80 Kg Net weight 4,73 Kg

Notes

* Electrical connection point



5920



- | | |
|---|-------------------------------|
| Finishes | LED temperature colour |
| ● 10/ __ White
(NCS S 0300-N) | /1 _ 2700 K |
| ● 13/ __ Off-White
(NCS S 1000-N) | CRI >90 1740 lm 129 lm/W |
| ● 47/ __ Green L1
(NCS S 4005-G80Y) | /3 _ 3500 K |
| | CRI >90 1868,9 lm 138,4 lm/W |

- Control**
- 5920** __ / _ 1
DALI-2
-
- 5920** __ / _ B
1-10V, Push


Materials
Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging
1 Box 0,45 x 0,45 x 0,25 m
Vol 0,0051 m³
Gross weight 3,10 Kg Net weight 1,91 Kg

Notes
* Electrical connection point

5922



- | | |
|--|-------------------------------|
| Finishes | LED temperature colour |
| ● 10/ __ White
(NCS S 0300-N) | /1 _ 2700 K |
| ● 71/ __ White,
Green L1, Off-white
(NCS S 0300-N,
NCS S 4005-G80Y,
NCS S 1000-N) | CRI >90 13920 lm 139 lm/W |
| | /3 _ 3500 K |
| | CRI >90 14951,1 lm 149,5 lm/W |

- Control**
- 5922** __ / _ A
DALI-2, 1-10V, Push
-
- 5922** __ / _ Z
Casambi


Materials
Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
4 x LED PLATE 25 W 700mA
Constant Current 700 mA
220-240V 50/60Hz

Packaging
1 Box 1,35 x 1,20 x 0,30 m
Vol 0,0486 m³
Gross weight 26,60 Kg Net weight 19,98 Kg

Notes
* Electrical connection point

5924



- | | |
|--|-------------------------------|
| Finishes | LED temperature colour |
| ● 10/ __ White
(NCS S 0300-N) | /1 _ 2700 K |
| ● 72/ __ White,
Green L1
(NCS S 0300-N,
NCS S 4005-G80Y) | CRI >90 9897,27 lm 132 lm/W |
| ● 73/ __ White,
Grey L1
(S 0300-N,
NCS S 1000-N) | /3 _ 3500 K |
| | CRI >90 10630,4 lm 141,7 lm/W |

- Control**
- 5924** __ / _ A
DALI-2, 1-10V, Push
-
- 5924** __ / _ Z
Casambi


Materials
Shade: Aluminum. Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum.

Light Source and electronics
3 x LED PLATE 25 W 700mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging
1 Box 1,45 x 1,10 x 0,25 m
Vol 0,0399 m³
Gross weight 27 Kg Net weight 20,80 Kg

Notes
* Electrical connection point

5926



Finishes
 ● 10/ _ _ White
 (NCS S 0300-N)

LED temperature colour
 /1 _ 2700 K **D**
 CRI >90 6598,18 lm 132 lm/W
 /3 _ 3500 K **E**
 CRI >90 7086,9 lm 141,7 lm/W

Control
 5926 _ _ / _ A
 DALI-2, 1-10V, Push

Materials
 Shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.


Light Source and electronics
 2 x LED PLATE 25 W 700 mA
 Constant Current 700 mA
 110~240V 50/60Hz

Packaging
 1 Box 1,05 x 1,05 x 0,25 m
 Vol 0,0276 m³
 Gross weight 14,60 Kg Net weight 10,08 Kg

Notes
 * Electrical connection point




Pendants

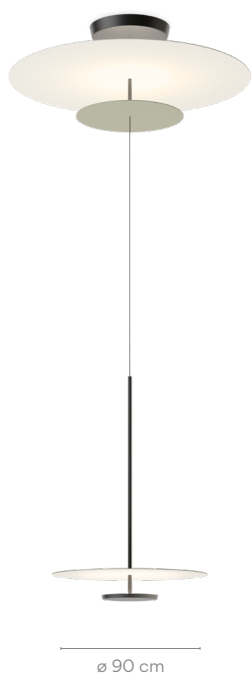

5930




5935

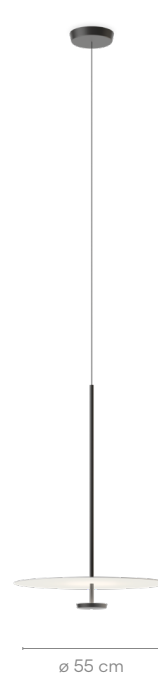

5940

5930

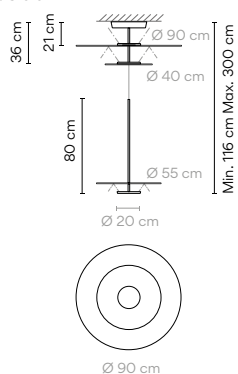

Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

- /1_ 2700 K CRI >90 9897,27 lm 132 lm/W
- /3_ 3500 K CRI >90 10630,4 lm 141,7 lm/W

Control

- 5930 _ _ / _ A DALI, 1-10V, Push
- 5930 _ _ / _ Z Casambi

Materials

Shade: Aluminum Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum

Light Source and electronics

3 x LED PLATE 25 W 700mA
Constant Current 700 mA
220-240V 50/60Hz

Packaging

1 Box 0,96x0,96x0,50 m
Vol 0,4608 m³
Gross weight 19 Kg Net weight 10,5 Kg

Notes

Adjust the height on installation




1160 10 /1A _18

Model
Finish
LED temperature colour
Control
Electrical connection
Only for pendants



5935



Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

- /1 _ 2700 K CRI >90 1740 lm 129 lm/W
- /3 _ 3500 K CRI >90 1868,9 lm 138,4 lm/W

Control

- 5935 _ _ / _ 1 DALI
- 5935 _ _ / _ B 1-10V, Push

Materials

Shade: Aluminum Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging

1 Box 0,45 x 0,80 x 0,20 m
Vol 0,0072 m³
Gross weight 6,10 Kg Net weight 5 Kg


Notes

Extra cable length.

Electrical connection

- _18 Surface
- _23 Free Wire
- _23 Built-in
- _31 Remote
- _31 Remote Micro for plaster ceilings
- _32 Remote
- _32 Remote XXS for all types of drop ceilings

5940



Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

- /1 _ 2700 K CRI >90 1740 lm 129 lm/W
- /3 _ 3500 K CRI >90 1868,9 lm 138,4 lm/W

Control

- 5940 _ _ / _ 1 DALI
- 5940 _ _ / _ B 1-10V, Push

Materials

Shade: Aluminum Diffuser: Polycarbonate.
Structures: Steel. Canopy: Aluminum

Light Source and electronics

1 x LED PLATE 13,5 W 700 mA
Constant Current 700 mA
110-240V 50/60Hz

Packaging


1 Box 0,65 x 0,85 x 0,20 m
Vol 0,0111 m³
Gross weight 7 Kg Net weight 6 Kg

Notes


Extra cable length.

Composing pendants


Next sketches are composed by one or more compositions

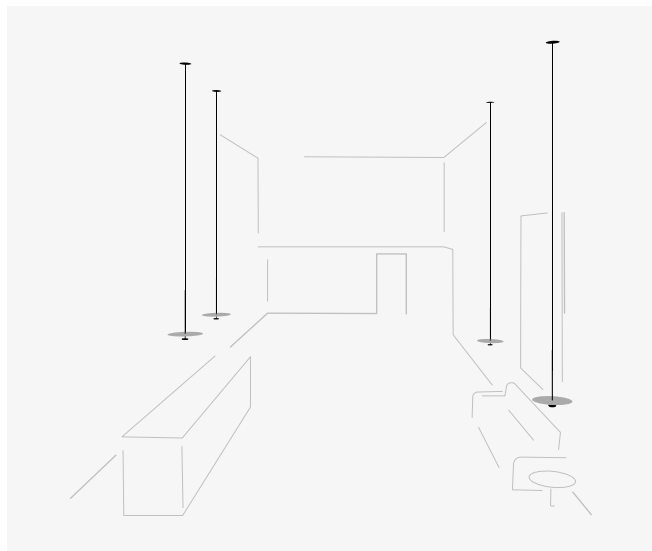


4 x 5935.

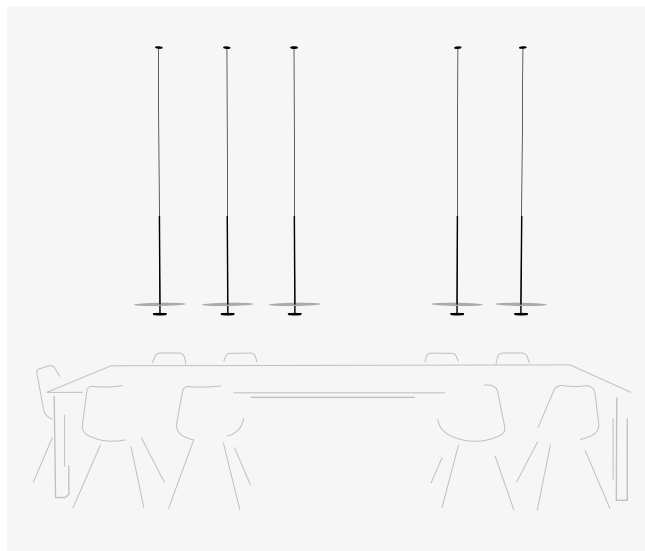


5 x 5935.

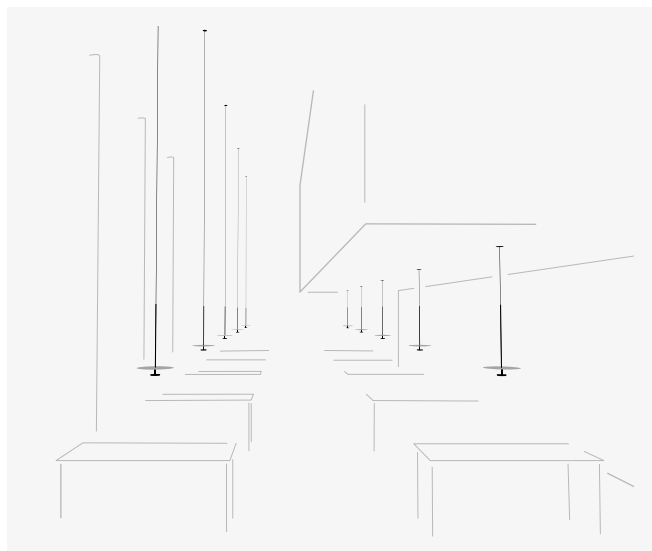

10 x 5935..

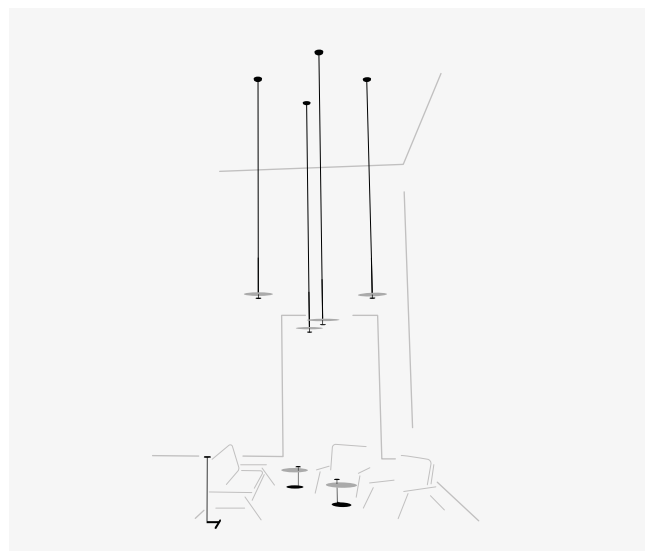


4 x 5935.

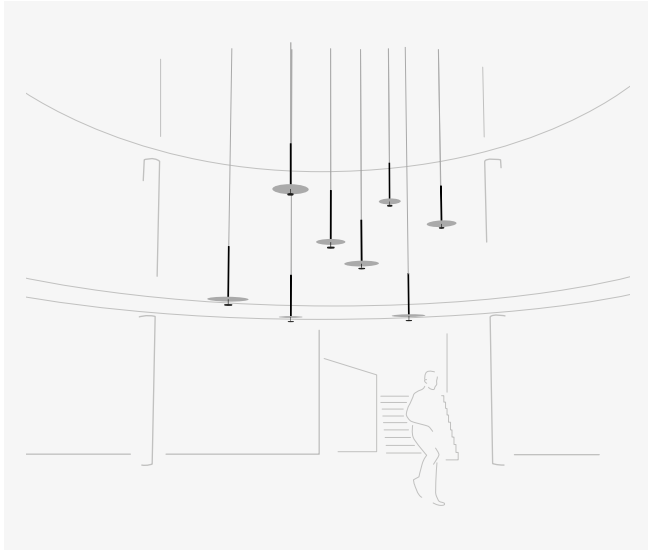

8 x 5935.

Each project is unique.
Visit vibia.com and
choose among multiple
compositions designed
and adapted to your
project needs.

Personalise your own
Flat composition quick
and easy at vibia.com

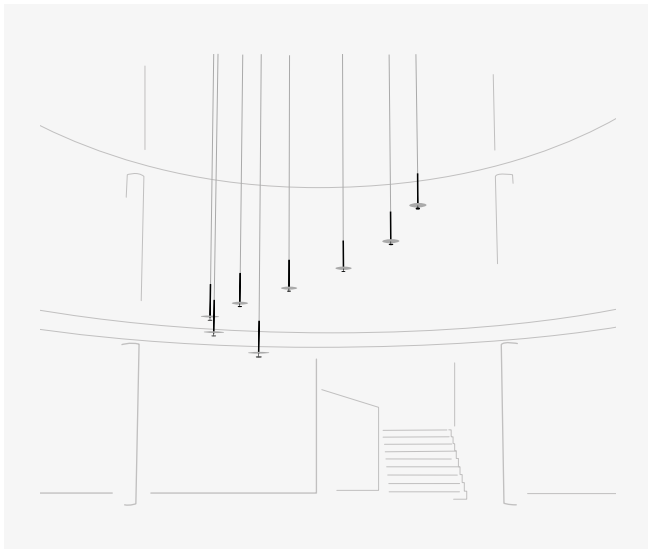

8 x 5935.

Electrical connection options for model 5935


Choose your preferred installation option according to your needs.
For each composition, the optimal minimum number of drivers will be delivered.

Drop ceiling



The innovative remote and built-in fittings accentuate the silkiness and lightness of compositions on suspended ceilings, its great visual grandeur taking center stage.

For Ref. 5935

Remote



Micro \varnothing 3 cm
height 7 cm
for plaster ceilings.
Black finish.




XXS \varnothing 6 cm
height 6 cm
for all types of drop ceilings. Match with fixture finish.

Built-in



\varnothing 8 cm
height 6 cm
match with fixture finish.



Regular ceiling

When architecture does not allow for performance, surface and free wire showcase possibilities for any need or desire with no limits, ideal for both individual or cluster arrangements.

For Ref. 5935


Surface



ø 16,7 cm


match with
fixture finish.

Free Wire




1 wire

ø 20 cm




2 - 3 wires

ø 22 cm



4 - 6 wires



ø 36 cm



7 - 9 wires

ø 40 cm

you can choose the finish of the canopy
among black, white or any colour
matching one of the pendants.




Floor



5945



5950




5955



5957

5945



- Finishes**
- 13/ _ _ Off-White (NCS S 1000-N)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)
- LED temperature colour**
- /1_ 2700 K
 - CRI >90 1365,8 lm 98 lm/W
 - /3_ 3500 K
 - CRI >90 1467,0 lm 104,8 lm/W

Control
5945 _ _ / _ 5
Push

Materials
Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.


Light Source and electronics
2 x LED PLATE 7 W 400 mA
Driver Constant Voltage 24V
110-240V 50/60Hz

Packaging
1 Box 0,65 x 1,00 x 0,25 m
Vol 0,0163 m³
Gross weight 15,85 Kg Net weight 15,25 Kg

Notes
Electric cable 2 m



5950



- Finishes**
- 10/ _ _ White (NCS S 0300-N)
- LED temperature colour**
- /1_ 2700 K
 - CRI >90 682,9 lm 98 lm/W
 - /3_ 3500 K
 - CRI >90 733,5 lm 104,8 lm/W

Control
5950 _ _ / _ 5
Push

Materials
Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics
1 x LED PLATE 7 W 400 mA
Driver Constant Voltage 24V
110-240V 50/60Hz


Packaging
1 Box 0,65 x 0,65 x 0,20 m
Vol 0,0085 m³
Gross weight 14,60 Kg Net weight 12,71 Kg

Notes
Electric cable 2 m





5955



Finishes

- 11/ __ Black (NCS S 8500-N)
- 37/ __ Terra Red (NCS S 4040-Y70R)
- 47/ __ Green L1 (NCS S 4005-G80Y)

LED temperature colour

- /1 _ 2700 K CRI >90 682,9 lm 98 lm/W
- /3 _ 3500 K CRI >90 733,5 lm 104,8 lm/W

Control

5955 __ / _ 5
 Push

Materials

Shade: Aluminum.
 Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics

1 x LED PLATE 7 W 400 mA
 Driver Constant Voltage 24V
 110-240V 50/60Hz


Packaging

1 Box 0,30 x 1,10 x 0,10 m
 Vol 0,0033 m³
 Gross weight 4,80 Kg Net weight 3,50 Kg

Notes

Electric cable 2 m

5957



Finishes

- 37/ __ Terra Red (NCS S 4040-Y70R)
- 47/ __ Green L1 (NCS S 4005-G80Y)

LED temperature colour

- /1 _ 2700 K CRI >90 682,9 lm 98 lm/W
- /3 _ 3500 K CRI >90 733,5 lm 104,8 lm/W

Control

5957 __ / _ 5
 Push

Materials

Shade: Aluminum.
 Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics

1 x LED PLATE 7 W 400 mA
 Constant Voltage 24V
 110-240V 50/60Hz

Packaging

1 Box 0,40 x 1,10 x 0,10 m
 Vol 0,0044 m³
 Gross weight 6,10 Kg Net weight 4,46 Kg

Notes

Electric cable 2 m

Table



5965

Finishes

- 13/ _ _ Off-White (NCS S 1000-N)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1_ 2700 K F
CRI >90 682,9 lm 98 lm/W

Control

5965 _ _ / _ 5
Push

Materials

Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics

1 x LED PLATE 7W 400mA
Constant Voltage 24V
110-240V 50/60Hz

Packaging

1 Box 0,50 x 0,50 x 0,7 m
Vol 0,0018 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes

Electric cable 2 m

LED ⬇ IP20 CE ⚡ Dimmer Bi-volt

5970

Finishes

- 11/ _ _ Black (NCS S 8500-N)
- 37/ _ _ Terra Red (NCS S 4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED temperature colour

/1_ 2700 K F
CRI >90 682,9 lm 98 lm/W

Control

5970 _ _ / _ 5
Push

Materials

Shade: Aluminum.
Diffuser: Polycarbonate. Structures: Steel.

Light Source and electronics

1 x LED PLATE 7W 400mA
Constant Voltage 24V
110-240V 50/60Hz

Packaging

1 Box 0,20 x 0,40 x 0,07 m
Vol 0,0072 m³
Gross weight 4 Kg Net weight 3,11 Kg

Notes

Electric cable 2 m

LED ⬇ IP20 CE ⚡ Dimmer Bi-volt

