

Kontur

Design by Sebastian Herkner

Providing a framework for light, the Kontur collection serves as an elegant stage setting for the linear light source it contains. Its minimalist black frame pairs with different diffusers or reflectors in a poetic balance, creating myriad lighting ambiances.

Wall



20 x 92 cm

6414

20 x 122 cm

6416

20 x 162 cm

6418


19 x 92 cm

6444

19 x 122 cm

6446

6414



Finishes

- 11/ __ Black (NCS S 8500-N)

LED temperature colour

- /7 _ 2200 K CRI >90 2041,15 lm 97,2 lm/W
- /1 _ 2700 K CRI >90 2381,3 lm 113 lm/W
- /2 _ 3000 K CRI >90 2381,3 lm 113 lm/W

Control

- 6414 __ / _ 1 DALI
- 6414 __ / _ 3 1-10V
- 6414 __ / _ 5 Push
- 6414 __ / _ Z Casambi

Materials

Concave shade: Aluminum. Diffuser: Polycarbonate. Structures: Steel. Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 20,8 W 750 mA
Constant Current 750 mA
90-305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,05 m
Vol 0,095 m³
Gross weight 5,5 Kg Net weight 3,5 Kg



6416



Finishes

- 11/ __ Black (NCS S 8500-N)

LED temperature colour

- /7 _ 2200 K CRI >90 2703,32 lm 96,9 lm/W
- /1 _ 2700 K CRI >90 3153,9 lm 113 lm/W
- /2 _ 3000 K CRI >90 3153,0 lm 113 lm/W

Control

- 6416 __ / _ 1 DALI
- 6416 __ / _ 3 1-10V
- 6416 __ / _ 5 Push
- 6416 __ / _ Z Casambi

Materials


Concave shade: Aluminum. Diffuser: Polycarbonate. Structures: Steel. Canopy: Aluminum.

Light Source and electronics


1 x LED STRIP 27,9 W 750 mA
Constant Current 750 mA
90-305V 50/60Hz

Packaging

1 Box 0,30 x 0,30 x 1,35 m
Vol 0,122 m³
Gross weight 5,8 Kg Net weight 3,8 Kg



6418



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED temperature colour
 /7 _ 2200 K **F** →
 CRI >90 3604,42 lm 96,9 lm/W
 /1 _ 2700 K **E** →
 CRI >90 4205,2 lm 113 lm/W
 /2 _ 3000 K **F** →
 CRI >90 4205,2 lm 113 lm/W

Control
 6418 _ _ / _ 1
 DALI

6418 _ _ / _ 3
 1-10V

6418 _ _ / _ 5
 Push

6418 _ _ / _ Z
 Casambi

Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 37,2 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz


Packaging

1 Box 0,30 x 0,30 x 0,175 m
 Vol 0,1580 m³
 Gross weight 6,5 Kg Net weight 4 Kg

LED IP20 CE EAC

Dimmer Multi-volt

6444



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED temperature colour
 /7 _ 2200 K **F** →
 CRI >90 2041,15 lm 98,1 lm/W
 /1 _ 2700 K **E** →
 CRI >90 2381,3 lm 114 lm/W
 /2 _ 3000 K **F** →
 CRI >90 2381,3 lm 114 lm/W
 /3 _ 3500 K **E** →
 CRI >90 2551,44 lm 122,7 lm/W

Control
 6444 _ _ / _ 1
 DALI

6444 _ _ / _ 3
 1-10V

6444 _ _ / _ 5
 Push

6444 _ _ / _ Z
 Casambi

Materials

Glass shade: Opal triplex Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz


Packaging

1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 6,2 Kg Net weight 3,7 Kg

LED IP20 CE EAC

Dimmer Multi-volt

6446



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED temperature colour
 /7 _ 2200 K **F** →
 CRI >90 2703,32 lm 96,9 lm/W
 /1 _ 2700 K **E** →
 CRI >90 3153,9 lm 113 lm/W
 /2 _ 3000 K **F** →
 CRI >90 3153,0 lm 113 lm/W
 /3 _ 3500 K **E** →
 CRI >90 3379,15 lm 121,1 lm/W

Control
 6446 _ _ / _ 1
 DALI

6446 _ _ / _ 3
 1-10V

6446 _ _ / _ 5
 Push

6446 _ _ / _ Z
 Casambi

Materials

Glass shade: Opal triplex Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz


Packaging

1 Box 0,30 x 0,30 x 1,35 m
 Vol 0,122 m³
 Gross weight 9 Kg Net weight 6 Kg

LED IP20 CE EAC


Dimmer Multi-volt

Pendants

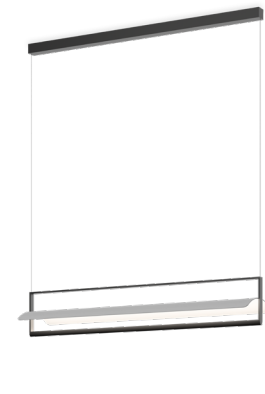


92 cm

6434

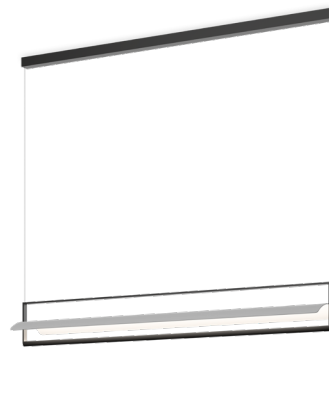

122 cm

6436

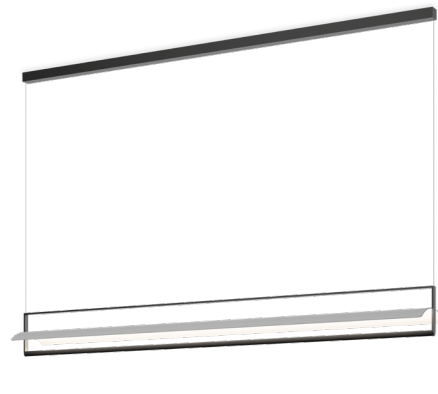

162 cm

6438



92 cm


6474



122 cm

6476

6434



Finishes
 ● 11/ _ _ Black
 (NCS S 8500-N)

LED temperature colour
 /7 _ 2200 K **F**
 CRI >90 2041,15 lm 98,1 lm/W
 /1 _ 2700 K **E**
 CRI >90 2381,3 lm 114 lm/W
 /2 _ 3000 K **F**
 CRI >90 2381,3 lm 114 lm/W
 /3 _ 3500 K **E**
 CRI >90 2551,44 lm 122,7 lm/W

Control

6434 _ _ / _ 1
 DALI
 6434 _ _ / _ 3
 1-10V
 6434 _ _ / _ 5
 Push
 6434 _ _ / _ Z
 Casambi

Materials

Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics

1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz

Packaging


1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 5,5 Kg Net weight 3,5 Kg

Notes

Extra cable length.



6436



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED temperature colour
 /7 2200 K **F**
 CRI >90 2703,32 lm 96,9 lm/W
 /1 2700 K **E**
 CRI >90 3153,9 lm 113 lm/W
 /2 3000 K **F**
 CRI >90 3154,0 lm 113 lm/W
 /3 3500 K **E**
 CRI >90 3379,15 lm 121,1 lm/W

Control
 6436 __ / _ 1
 DALI
 6436 __ / _ 3
 1-10V
 6436 __ / _ 5
 Push
 6436 __ / _ Z
 Casambi

Materials
 Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.


Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,35 m
 Vol 0,122 m³
 Gross weight 5,8 Kg Net weight 3,8 Kg

Notes
 Extra cable length.



6438



Finishes
 11/ __ Black
 (NCS S 8500-N)

LED temperature colour
 /7 2200 K **F**
 CRI >90 3604,42 lm 96,9 lm/W
 /1 2700 K **E**
 CRI >90 4205,2 lm 113 lm/W
 /2 3000 K **F**
 CRI >90 4205,2 lm 113 lm/W
 /3 3500 K **E**
 CRI >90 4505,53 lm 121,1 lm/W

Control
 6438 __ / _ 1
 DALI
 6438 __ / _ 3
 1-10V
 6438 __ / _ 5
 Push
 6438 __ / _ Z
 Casambi

Materials
 Concave shade: Aluminum. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.


Light Source and electronics
 1 x LED STRIP 37,2 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,75 m
 Vol 0,158 m³
 Gross weight 6,5 Kg Net weight 4 Kg

Notes
 Extra cable length.



6474



Finishes
 ● 11/ __ Black
 (NCS S 8500-N)

LED temperature colour
 /7 2200 K **F**
 CRI >90 2041,15 lm 98,1 lm/W
 /1 2700 K **E**
 CRI >90 2381,3 lm 114 lm/W
 /2 3000 K **F**
 CRI >90 2381,3 lm 114 lm/W

Control
 6474 __ / _ 1
 DALI
 6474 __ / _ 3
 1-10V
 6474 __ / _ 5
 Push
 6474 __ / _ Z
 Casambi

Materials
 Glass shade: Opal triplex. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 20,8 W 750 mA
 Constant Current 750 mA
 90~305V 50/60Hz

Packaging
 1 Box 0,30 x 0,30 x 1,05 m
 Vol 0,095 m³
 Gross weight 6,2 Kg Net weight 3,7 Kg


Notes
 Extra cable length.



6476

- | | |
|---|---|
| <p>Finishes</p> <ul style="list-style-type: none"> ● 11/ _ _ Black (NCS S 8500-N) | <p>LED temperature colour</p> <ul style="list-style-type: none"> /7 2200 K F CRI >90 2703,32 lm 96,9 lm/W /1 2700 K E CRI >90 3153,9 lm 113 lm/W /2 3000 K F CRI >90 3153,0 lm 113 lm/W |
|---|---|

- Control**
- 6476 _ _ / _ 1 DALI
 - 6476 _ _ / _ 3 1-10V
 - 6476 _ _ / _ 5 Push
 - 6476 _ _ / _ Z Casambi



Materials
 Glass shade: Opal triplex. Diffuser: Polycarbonate.
 Structures: Steel. Canopy: Aluminum.

Light Source and electronics
 1 x LED STRIP 27,9 W 750 mA
 Constant Current 750 mA
 90-305V 50/60Hz

Packaging
 1 Box 0,75 x 0,45 x 1,35 m
 Vol 0,122 m³
 Gross weight 9 Kg Net weight 6 Kg

Notes
 Extra cable length.

- LED
- IP20
- CE
- EAC
- Dimmer
- Multi-volt

