

Array

Design by Umut Yamac

A striking pendant of impressive proportions, Array is an exploration of thread and its potential to create lightweight and dynamic sculptures of light.

Pendants

Height 70 cm



Ø 37 cm


1800



Ø 55 cm


1815

Height 110 cm




Ø 37 cm

1805




Ø 55 cm

1820



Ø 83 cm

1830



Ø 124 cm

1840

Height 190 cm



Ø 37 cm

1810



Ø 55 cm

1825



Ø 83 cm

1835



Ø 124 cm

1845

Height 70 cm



Ø 55 cm

1850

Height 110 cm



Ø 55 cm

1855



Ø 83 cm

1865



Ø 124 cm

1875

Height 190 cm



Ø 55 cm

1860



Ø 83 cm


1870



Ø 124 cm

1880

1800



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 2662 lm 121 lm/W

Control
 1800 __ / _ 3
 1-10V
 1800 __ / _ D
 Push; DALI-2
 1800 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Packaging
 1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 7 Kg Net weight 4,8 Kg


Light Source and electronics
 1 x LED STRIP 22W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1805



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 2662 lm 121 lm/W

Control
 1805 __ / _ 3
 1-10V
 1805 __ / _ D
 Push; DALI-2
 1805 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Packaging
 1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 7,3 Kg Net weight 5,1 Kg


Light Source and electronics
 1 x LED STRIP 22W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1810



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 2662 lm 121 lm/W

Control
 1810 __ / _ 3
 1-10V
 1810 __ / _ D
 Push; DALI-2
 1810 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Packaging
 1 Box 0,62 x 0,62 x 0,12 m
 Vol 0,0461 m³
 Gross weight 7,6 Kg Net weight 5,4 Kg


Light Source and electronics
 1 x LED STRIP 22W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1815



Finishes (threads)

- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K CRI >90 3993 lm 121 lm/W

Control

1815 _ _ / _ 3
1-10V

1815 _ _ / _ D
Push; DALI-2

1815 _ _ / _ Z
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,4 Kg Net weight 6,2 Kg




Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1820

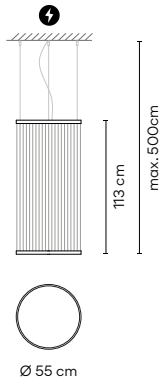

Finishes (threads)

- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K CRI >90 3993 lm 121 lm/W

Control

1820 _ _ / _ 3
1-10V

1820 _ _ / _ D
Push; DALI-2

1820 _ _ / _ Z
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 8,8 Kg Net weight 6,6 Kg




Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1825

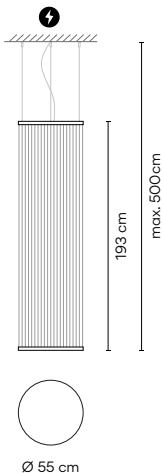

Finishes (threads)

- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
- 37/ _ _ Terra Red (NCS S4040-Y70R)
- 47/ _ _ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature

/1_ 2700 K CRI >90 3993 lm 121 lm/W

Control

1825 _ _ / _ 3
1-10V

1825 _ _ / _ D
Push; DALI-2

1825 _ _ / _ Z
Casambi

Finishes (rings and canopy)

- Black (NCS S 8500-N)

Materials

Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics

1 x LED STRIP 33W 48V
Constant Voltage 48V
90-305Vac 50/60Hz

Packaging

1 Box 0,62 x 0,62 x 0,12 m
Vol 0,0461 m³
Gross weight 9,2 Kg Net weight 7 Kg





Multi-volt Dimmer

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

1830



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 6050 lm 121 lm/W

Control
 1830 __ / _ 3
 1-10V
 1830 __ / _ D
 Push; DALI-2
 1830 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.



Packaging
 1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 13,5 Kg Net weight 9,5 Kg

Light Source and electronics
 1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Multi-volt Dimmer

Select Eleltrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1835



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 6050 lm 121 lm/W

Control
 1835 __ / _ 3
 1-10V
 1835 __ / _ D
 Push; DALI-2
 1835 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.



Packaging
 1 Box 0,93 x 0,93 x 0,120 m
 Vol 0,1037 m³
 Gross weight 14,1 Kg Net weight 10,1 Kg

Light Source and electronics
 1 x LED STRIP 50W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz

Multi-volt Dimmer

Select Eleltrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1840



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K CRI >90 9196 lm 121 lm/W

Control
 1840 __ / _ 3
 1-10V
 1840 __ / _ D
 Push; DALI-2
 1840 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Packaging
 1 Box 1,35 x 1,35 x 0,120 m
 Vol 0,2187 m³
 Gross weight 19 Kg Net weight 13 Kg

Light Source and electronics
 1 x LED STRIP 76W 48V
 Constant Voltage 48V
 90~305Vac 50/60Hz


Multi-volt Dimmer

Select Eleltrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1160 | 10 | /1A | 18

Model | Finish | LED Colour Temperature | Control | Electrical connection

1845

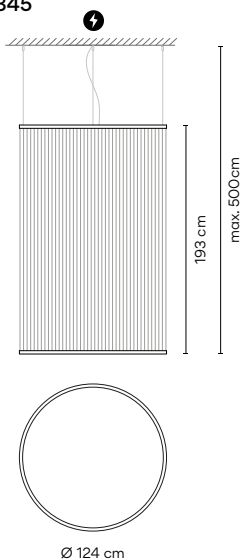

- Finishes (threads)**
- 24/ _ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 9196 lm 121 lm/W

- Control**
- 1845 _ _ / _ 3
1-10V
- 1845 _ _ / _ D
Push; DALI-2
- 1845 _ _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90-305Vac 50/60Hz


Packaging
1 Box 1,35 x 1,35 x 0,120 m
Vol 0,2187 m³
Gross weight 19,9 Kg Net weight 13,9 Kg

LED IP20


Multi-volt

Select Electrical connection

- _10 Surface
- _24 Built-in S
- _31 Remote Micro

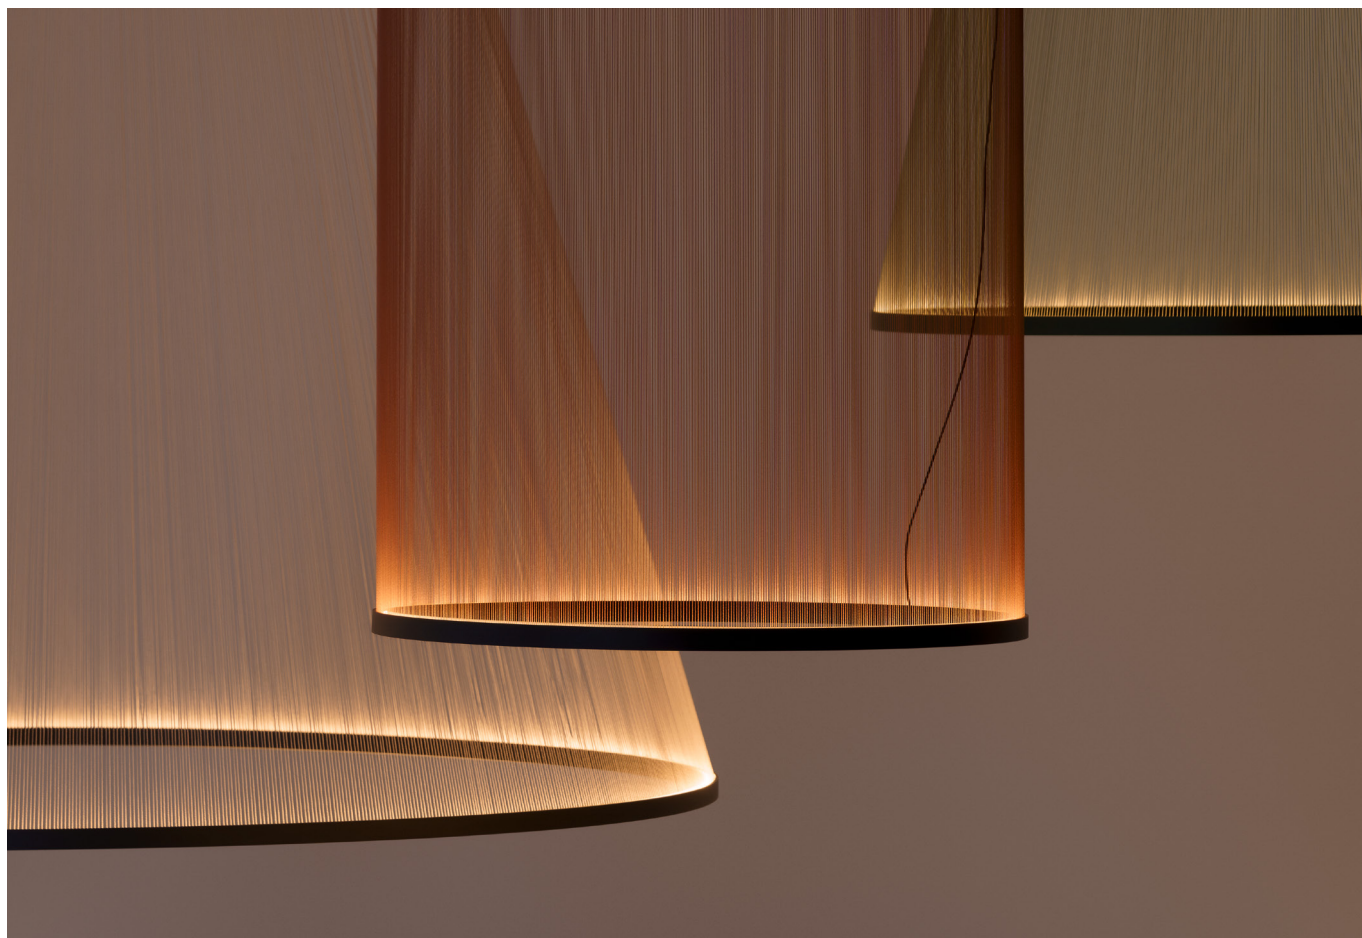

1850



Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K
 CRI >90 3993 lm 121 lm/W


Control
 1850 __ / _ 3
 1-10V
 1850 __ / _ D
 Push; DALI-2
 1850 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz


Packaging
 1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 7,9 Kg Net weight 5,7 Kg



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1855

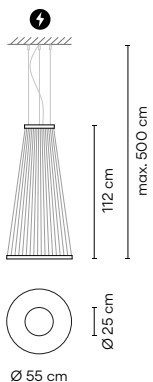

Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K
 CRI >90 3993 lm 121 lm/W

Control
 1855 __ / _ 3
 1-10V
 1855 __ / _ D
 Push; DALI-2
 1855 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz


Packaging
 1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 8,3 Kg Net weight 6,1 Kg



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1860

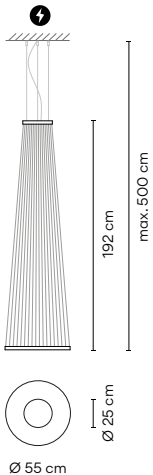

Finishes (threads)
 ● 24/ __ Beige M1 (NCS S 2005-Y50R)
 ● 37/ __ Terra Red (NCS S4040-Y70R)
 ● 47/ __ Green L1 (NCS S 4005-G80Y)

LED Colour Temperature
 /1_ 2700 K
 CRI >90 3993 lm 121 lm/W

Control
 1860 __ / _ 3
 1-10V
 1860 __ / _ D
 Push; DALI-2
 1860 __ / _ Z
 Casambi

Finishes (rings and canopy)
 ● Black (NCS S 8500-N)

Materials
 Upper ring: Aluminum. Bottom ring: Brass.
 Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
 1 x LED STRIP 33W 48V
 Constant Voltage 48V
 90-305Vac 50/60Hz


Packaging
 1 Box 0,62 x 0,62 x 0,121 m
 Vol 0,0461 m³
 Gross weight 8,7 Kg Net weight 6,5 Kg



Multi-volt Dimmer

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

1865

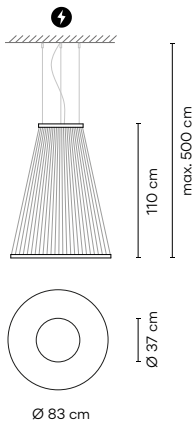

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W

- Control**
- 1865 _ / _ 3
1-10V
- 1865 _ / _ D
Push; DALI-2
- 1865 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 11,8 Kg Net weight 8,8 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1870

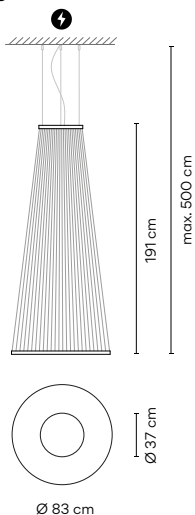

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 6050 lm 121 lm/W

- Control**
- 1870 _ / _ 3
1-10V
- 1870 _ / _ D
Push; DALI-2
- 1870 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 50W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 0,93 x 0,93 x 0,120 m
Vol 0,1037 m³
Gross weight 12,4 Kg Net weight 9,4 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1875

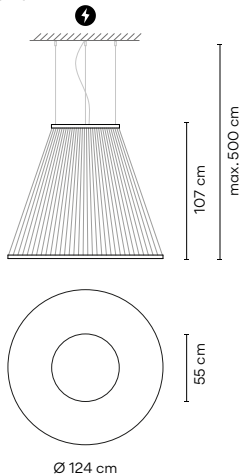

- Finishes (threads)**
- 24/ _ Beige M1 (NCS S 2005-Y50R)
 - 37/ _ Terra Red (NCS S4040-Y70R)
 - 47/ _ Green L1 (NCS S 4005-G80Y)
- LED Colour Temperature**
- /1_ 2700 K CRI >90 9196 lm 121 lm/W

- Control**
- 1875 _ / _ 3
1-10V
- 1875 _ / _ D
Push; DALI-2
- 1875 _ / _ Z
Casambi

- Finishes (rings and canopy)**
- Black (NCS S 8500-N)

Materials
Upper ring: Aluminum. Bottom ring: Brass.
Diffuser: PC- Polycarbonate. Threads: PES FR.

Light Source and electronics
1 x LED STRIP 76W 48V
Constant Voltage 48V
90~305Vac 50/60Hz

Packaging
1 Box 1,35 x 1,35 x 0,12 m
Vol 0,2187 m³
Gross weight 15,9 Kg Net weight 11,9 Kg




Multi-volt Dimmer

Select Electrical connection

_10 Surface
_24 Built-in S
_31 Remote Micro

1880

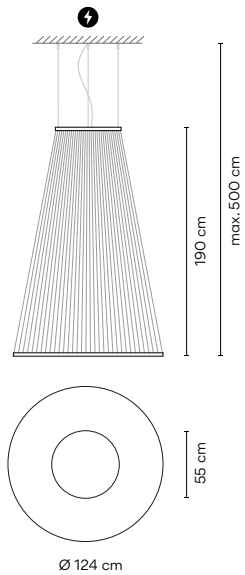

Finishes (threads) ● 24/ _ Beige M1 (NCS S 2005-Y50R) ● 37/ _ Terra Red (NCS S4040-Y70R) ● 47/ _ Green L1 (NCS S 4005-G80Y)	LED Colour Temperature /1_ 2700 K CRI >90 9196 lm 121lm/W	Control 1880 _ _ / _ 3 1-10V 1880 _ _ / _ D Push; DALI-2 1880 _ _ / _ Z Casambi
Finishes (rings and canopy) ● Black (NCS S 8500-N)	Materials Upper ring: Aluminum. Bottom ring: Brass. Diffuser: PC- Polycarbonate. Threads: PES FR.	Packaging 1 Box 1,35 x 1,35 x 0,12 m Vol 0,2187 m ³ Gross weight 16,8 Kg Net weight 12,8 Kg
Light Source and electronics 1 x LED STRIP 76W 48V Constant Voltage 48V 90-305Vac 50/60Hz	LED IP20 Multi-volt Dimmer	

Select Electrical connection
 _10 Surface
 _24 Built-in S
 _31 Remote Micro

Electrical connection options

Choose your preferred installation option according to your needs.

Drop ceiling

Regular ceiling

_31 Remote Micro



Ø 3 cm
 height 7 cm
 for plaster ceilings.
 Black finish.

_24 Built-in S



Ø 8 cm
 height 6 cm
 black finish.

_10 Surface



Ø 25,5 cm
 height 4,5 cm
 black finish.



Ø 37,5 cm
 height 4,5 cm
 black finish.

