


The Kepler collection is made of painted extruded aluminium, whose continuous line is obtained through a three-dimensional manufacturing process developed by Nemo. Designed on the basis of the mathematical principle of the Möbius strip. Diffuser in opaque technopolymer.

IT La collezione Kepler è realizzata in estruso di alluminio verniciato, la cui linea continua è ottenuta attraverso un processo di lavorazione tridimensionale sviluppato da Nemo. Disegnata alla base del principio matematico del nastro di Möbius. Diffusore in tecnopolimero opaco.


FR La collection Kepler est réalisée en aluminium extrudé peint, dont la ligne continue est obtenue grâce à un processus de fabrication tridimensionnel développé par Nemo. Conçue sur la base du principe mathématique de la bande de Möbius. Diffuseur en technopolymère opaque.

DE Die Kepler-Kollektion besteht aus lackiertem, extrudiertem Aluminium, dessen durchgehende Linie durch ein von Nemo entwickeltes dreidimensionales Herstellungsverfahren erzielt wird. Entworfen auf der Grundlage des mathematischen Prinzips des Möbiusbandes. Diffusor aus undurchsichtigem technopolymer.


*Kepler petite*

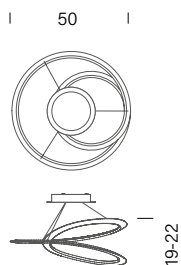

*Kepler minor*

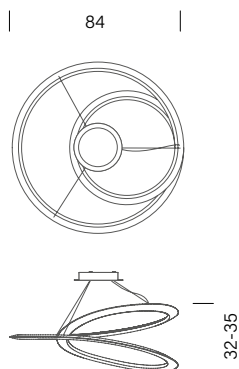

*Kepler*

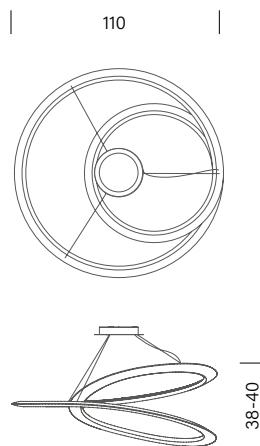

## Kepler finishes


*White*






*Black*



*Gold*



<p>Kepler petite</p> 	<p>Technical information</p>	<p>Linear LED 55W Downlight: diffused emission Dimmable 1-10V 110-240V 1954lm</p>	<p>CRI 85 IP20 Adjustable cable length from 2,5m to 0,4m</p>
	<p>Versions</p>	<p>Downlight 2700K</p> <hr/> <p>Downlight 3000K</p>	<p>White KES LWW 54 Black KES LNN 54 Gold KES LOW 54</p> <hr/> <p>White KES LWW 52 Black KES LNN 52 Gold KES LOW 52</p>
<p>Kepler minor</p> 	<p>Technical information</p>	<p>Linear LED 69W Downlight: diffused emission Uplight: diffused indirect emission Dimmable 1-10V 110-240V 4000lm</p>	<p>CRI 85 IP20 Adjustable cable length from 2,5m to 0,4m</p>
	<p>Versions</p>	<p>Downlight 2700K</p> <hr/> <p>Downlight 3000K</p> <hr/> <p>Uplight 2700K</p> <hr/> <p>Uplight 3000K</p>	<p>White KEM LWW 54 Black KEM LNN 54 Gold KEM LOW 54</p> <hr/> <p>White KEM LWW 52 Black KEM LNN 52 Gold KEM LOW 52</p> <hr/> <p>White KEM LWW 53 Black KEM LNN 53 Gold KEM LOW 53</p> <hr/> <p>White KEM LWW 51 Black KEM LNN 51 Gold KEM LOW 51</p>
<p>Kepler</p> 	<p>Technical information</p>	<p>Linear LED 83W Downlight: diffused emission Uplight: diffused indirect emission Dimmable 1-10V 110-240V 4800lm</p>	<p>CRI 85 IP20 Adjustable cable length from 2,5m to 0,4m</p>
	<p>Versions</p>	<p>Downlight 2700K</p> <hr/> <p>Downlight 3000K</p> <hr/> <p>Uplight 2700K</p> <hr/> <p>Uplight 3000K</p>	<p>White KEP LWW 54 Black KEP LNN 54 Gold KEP LOW 54</p> <hr/> <p>White KEP LWW 52 Black KEP LNN 52 Gold KEP LOW 52</p> <hr/> <p>White KEP LWW 53 Black KEP LNN 53 Gold KEP LOW 53</p> <hr/> <p>White KEP LWW 51 Black KEP LNN 51 Gold KEP LOW 51</p>