

U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.
Disponibile con opzione fonoassorbente.


Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS






WALL AND CEILING LAMP VERSION

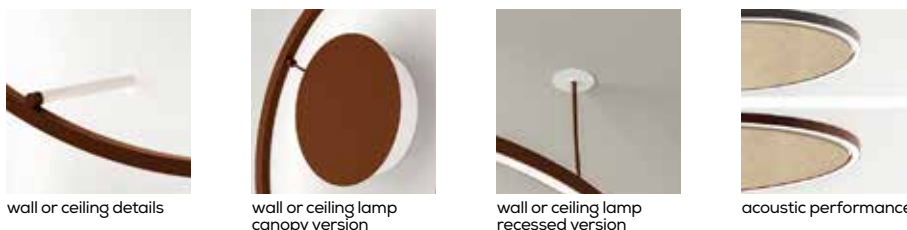

PL UL 1 160 h10 cm recessed
PL UL 2 160 h25 cm recessed

PL UL 1: kg 5 m³ 0,280
PL UL 2: kg 5,4 m³ 0,280

U-LIGHT / h10 cm or h25 cm recessed ceiling lamp / DRIVER NOT INCLUDED

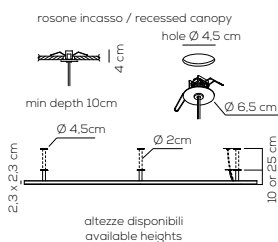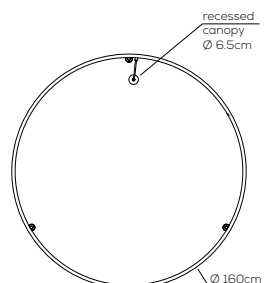

Type	Article	Colours	Version	Source
PL	UL 1 160 LED (h10 cm)	AN anthracite grey	IN recessed canopy	LED 102W - diffused beam 3000K*, 2700K 24VDC other CCT options available upon request
	UL 2 160 LED (h25 cm)	RU rust brown		

CE IP20 CRI90 dimmabile with dedicated PSU LED ~9025 lm* 88 lm/W* 24Vdc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

Installazione come plafoniera (downlight o uplight) oppure applique (con illuminazione verso la superficie di installazione).
Application: both as ceiling (downlight or uplight mounting) or wall lamp (only wallward light).

example composition code PL UL1160LED RU IN


Casambi compatibile / Casambi compatible.



KITFAPLUL000IAV opzione fonoassorbente avorio / sound absorbing option ivory. For more information see page 165



This luminaire contains a light source with the energy class F.



Equivalent Sound Absorption Area (A) in m² per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,05	0,29	0,93	1,48	1,60	1,52	1,45	1,04	1,34

CUSTOMER _____ NOTES _____

PL UL _ 160 LED __ IN

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.