

# U-Light

Timo Ripatti



Collezione composta da lampade da parete, soffitto e sospensione in alluminio.  
Disponibile in due colori e dimensioni. Sorgente luminosa a LED integrato dimmerabile.  
Disponibile con opzione fonoassorbente.

Collection consisting of wall, ceiling and suspended lamps in aluminium. Available in two colours and sizes. Built-in LED dimmable light source. Available with sound-absorbing panel option.

prodotto fonoassorbente / sound absorbing product

COLOURS



anthracite grey

canopy

rust brown

canopy

WALL AND CEILING LAMP VERSION



wall or ceiling details

wall or ceiling lamp canopy version

wall or ceiling lamp recessed version


acoustic performance



## SP ULA 120 canopy SP ULA 120 recessed

canopy kg 6,5 m<sup>3</sup> 0,180  
recessed kg 3 m<sup>3</sup> 0,150

Installazione downlight o uplight.  
Downlight or uplight mounting.

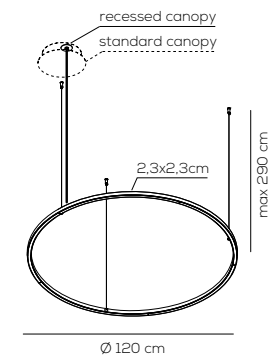

### U-LIGHT / suspension with canopy / DRIVER INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 120 LED	AN anthracite grey RU rust brown	XX standard canopy	LED 86W - diffused beam <b>3000K*, 2700K</b> other CCT options available upon request

CE IP20 CRI90 LED ~7736 lm\* 90 lm/W\* 100-240Vac

Casambi compatibile / Casambi compatible.



### U-LIGHT / recessed suspension lamp / DRIVER NOT INCLUDED

Type	Article	Colours	Version	Source
SP	ULA 120 LED	AN anthracite grey RU rust brown	IN recessed canopy	LED 74W - diffused beam <b>3000K*, 2700K</b> 24VDC other CCT options available upon request

CE IP20 CRI90 LED ~7736 lm\* 104 lm/W\* 24Vdc

foro - hole Ø 4,5 cm / profondità min - min depth 10 cm

example composition code SP ULA120LED RU IN  
Casambi compatibile / Casambi compatible.



### Equivalent Sound Absorption Area (A) in m<sup>2</sup> per lamp

FREQUENCY	125 HZ	250 HZ	500 HZ	1000 HZ	2000 HZ	4000 HZ	8000 HZ	125-8000 HZ	500-2000 HZ
A	0,04	0,35	1,23	2,03	2,13	2,09	2,02	1,41	1,80

SP ULA 120 LED \_ \_ \_ \_ CUSTOMER \_\_\_\_\_ NOTES \_\_\_\_\_

NOTICE: Luminous flux (lm) and efficacy (lm/W) for all LED luminaires is estimated based on nominal ratings of the LED sources. Technical data could be subject to alteration without notice. Axo Light does not provide legal guarantee for the accuracy of this data sheet.