

# WIREFLOW

Design by Arik Levy.

## Reference

**0330.**

## Application

Hanging lamps

## Installation type

Surface

## Description

Wireflow designed by Arik Levy. Linear hanging lamp. Its appearance, as a structure of fine cables finished with ten 4,5W LED terminals, is ideal for discretely connecting with classic chandelier models, taking this type of lamp to a new, groundbreaking and futuristic dimension. Employing CREA product configurator software, the design can be modified to adapt to your specific project requirements. Ideal for decorating large spaces, particularly ones with high ceilings, including hotel reception areas, retail sales points and food and drinks bars.

## Diffuser

Polycarbonate diffuser

## Materials


Body: Aluminum  
Horizontal rods: Steel  
Ceiling rose: Aluminum

## Finish



**0330-04** Black (RAL 9005)

## Sketch





## Electrical characteristics

10 x LED 4,5W 350mA

Total 44.8 W



# VIBIA

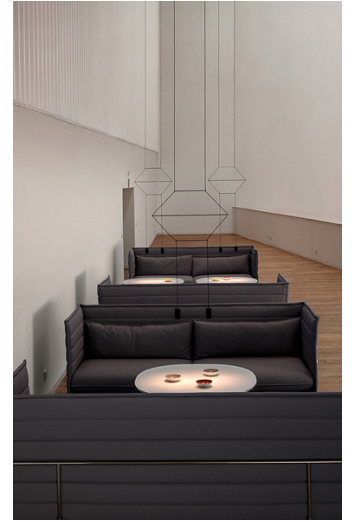

**Light source:** 2700K CRI >80 4903 lm 109 lm/W

**Fixture:** 2266 lm 50.35 lm/W

**Driver included:** CC - Constant Current 350 mA 220-240V 50/60Hz

**Electronic dimming** 1-10V Push

[ficha.fichatecnicaproducto.regulacion.opcional](#) DALI

## Technical characteristics

- Linear canopy

## Physical characteristics

1 Box / 0.08 x 0.20 x 3.30 m. / Vol. 0.0495 m<sup>3</sup> /

Gross weight 13.9 kg. / Net weight 12.5 kg.


## Installation and assembly

Please, see the installation manual

## Light distribution

### Highlight

Lamp used to highlight a specific element.



## Photometric data

Efficiency : 46.23%

Coordinate system : CG

Total flux : 4903.00 lm

Maximum value : 320.25 cd/klm


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m



Certificates

