

# PANZERI

## Arena

220-240V AC dimmable (DALI/Push DIM) and ON-OFF  
L07430.100.0518

titanium



### Data sheet

CODE	L07430.100.0518
SYSTEM POWER CONSUMPTION	92W
EFFICACY	73.17lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused + adjustable
BEAM ANGLE	30°
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM) and ON-OFF
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	9840lm
LUMEN OUTPUT	6732lm
EFFICIENCY	68.4%
WEIGHT	4.82 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	107,0 x 107,0 x 11,0



Suspension lighting fixture for interiors, with direct and indirect light emission and swivelling accent light.

Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.

Extruded polycarbonate diffuser with opaline finish.

Die-cast aluminium joints in polyacrylic paint.

Die-cast aluminium projectors rotating on two axes in polyacrylic paint.

Reflectors in thermoplastic material with chrome plated finish.

Textured glass screens.


Anti-glare snoots in black thermoplastic material.

5m (196,9") long steel suspension cables.

5m (196,9") long power cable in transparent PVC.

Power canopy with pickled sheet metal ceiling bracket and covering in white, black, bronze, mat brass or titanium polyacrylic paint.

### Technical drawing

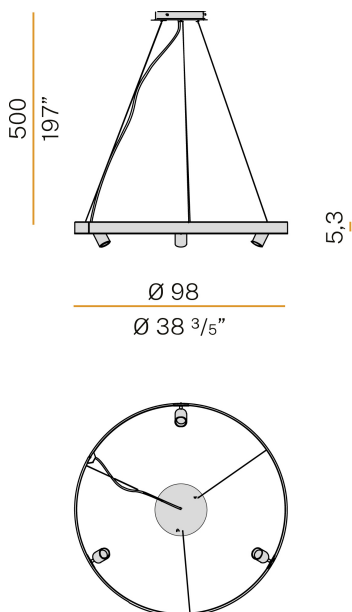

### Polar diagram

