

# PANZERI

## Hilow

220-240V AC dimmable (DALI/Push DIM)

A02901.115.0502

● white



### Data sheet


CODE	A02901.115.0502
SYSTEM POWER CONSUMPTION	68W
EFFICACY	56.06lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B10) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	220-240V AC
FREQUENCY	50/60Hz
ELECTRICAL CONFIGURATION	dimmable (DALI/Push DIM)
DRIVER	integrated included
NOMINAL LUMINOUS FLUX	8064lm
LUMEN OUTPUT	3812lm
EFFICIENCY	47.3%
WEIGHT	2,97 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS (CM)	87,0 x 118,0 x 14,0



Wall lighting fixture for interiors, with direct and indirect light emission.  
 Pickled sheet metal wall bracket in polyacrylic paint.  
 Pickled sheet metal wall plate in polyacrylic paint.  
 Extruded aluminium structure in white, mat black, bronze, mat brass or titanium polyacrylic paint.  
 Joints in turned brass and die-cast aluminium in polyacrylic paint.  
 Die-cast aluminium end caps in polyacrylic paint.  
 Extruded polycarbonate diffusers with black finish for direct light emission and opaline finish for indirect light emission.



### Technical drawing

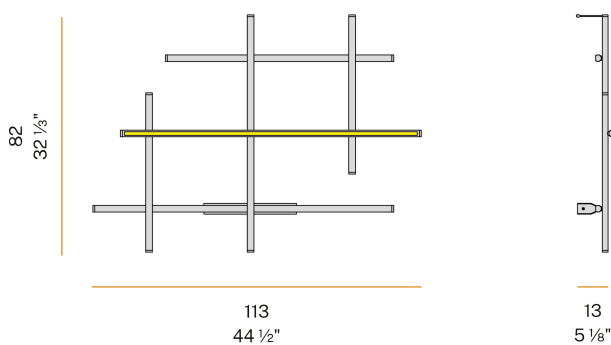

### Polar diagram

