





DOT LINE SUSPENSION



The Dot Collection combines the directness of exposed, spherical bulbs with the rich materiality of brass. Focused, geometric compositions contain these two features, balancing line, surface, and luminous points. The result is a collection of lamps based in the reflectivity of brass—lamps that are both atmospheric and firm.

type:	suspension	
construction:	brass body or powder coated aluminium and brass body brass or powder coated aluminium and brass hardware milk glass globes polyester cord	
specifications:	source: LED lamp provided (G9 base) power consumption: DOT11A - 4x 3.5W DOT11B - 5x 3.5W lumen output: DOT11A - 961lm DOT10B - 1202lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: ≥ 25 000h	
control:	refer to our recommended list of dimmer models	
cord length:	96" / 244 cm	
chain length:	90" / 229 cm	
weight:	DOT11A :	DOT11B :
	3.4 lb - 1.6 kg - brass	4.6 lb - 2.1 kg - brass
	2.6 lb - 1.2 kg - aluminium	3.8 lbs - 1.8 kg - aluminium
certifications:	    	
warranty:	2 years	

A

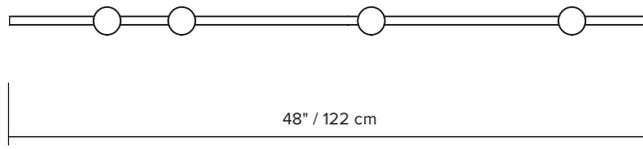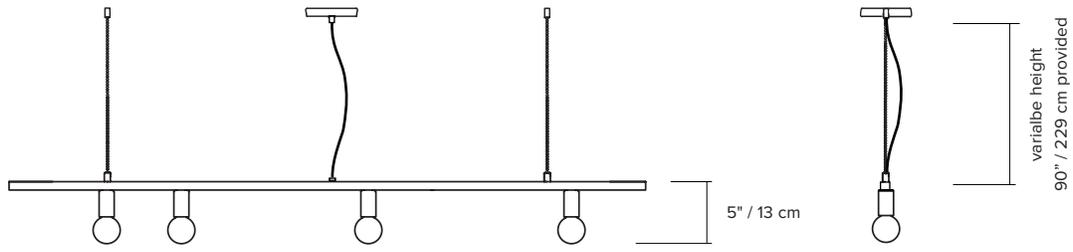

B

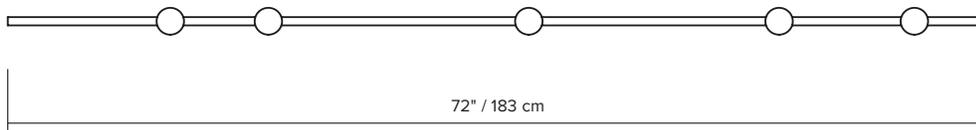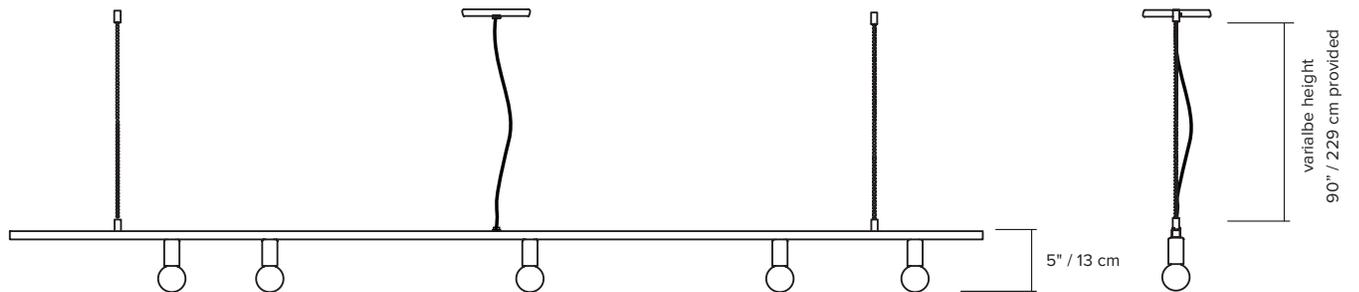

 G50 $\varnothing \pm 2" / 50 \text{ mm}$

ORDER GUIDE: SKU

COLLECTION	MODEL	FINISH*	CORD	CANOPY	HARDWARE
DOT dot	11A	BR brass	BK black	BR brass	BR brass anchors, brass bead chains
	11B	BK black	WH white	BK black	BK black anchors, stainless steel cables
		WH white		WH white	WH white anchors, stainless steel cables
DOT	11A	BR	BK	BR	BR = DOT11ABRBKBRBR
					example

FINISH



brass




flat black



flat white

NOTES:

- must be installed by an electrician
- stainless steel cables not meant for slanted ceilings
- not protected against liquids (refer to IP20)
- additional charges for modifications or for special orders
- please refer to maintenance sheet on website for cleaning instructions

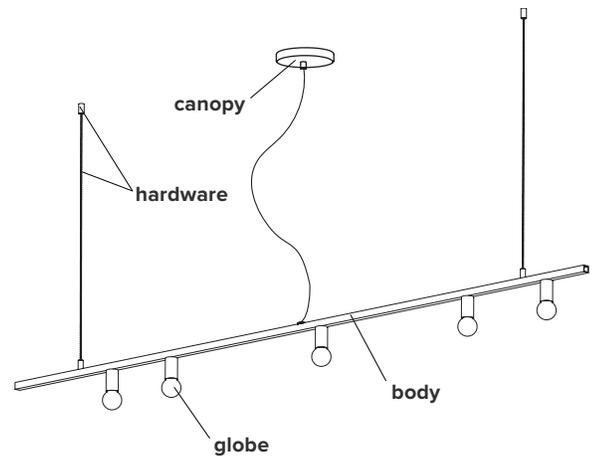

DIMMER SPECIFICATIONS

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL

