


Shape in fiber glass	Diffuser				
				· Andrews	
Matt white	White marble	Wengé	Walnut	Black marble	Ebony

Mounting	Ceiling	Dimmable	Yes (TRIAC, trailing edge)	Marking	(€ IP20 \F/ □
Environment	Indoor	C	Included	Weight	8.4kgs
Lampshade	Fiber glass and aluminium	Source	Led 35w 2700K 4000 lm		
Frame	Steel	Voltage	220-250V		



LIGHT DISTRIBUTION

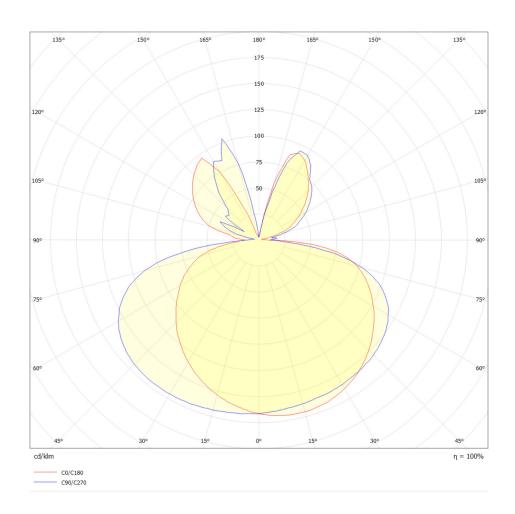

PHASE-CUT DIMMING

All our products are delivered and tested with analog phase-cut dimming capability.

DALI

For most situations phase-cut dimming is the right way but for new projects for your modern home or for hospitality projects you may need the digital standard DALI.

We also provide on request led drivers for DALI system, contact us!

CASAMBI