



Design By Ramos & Bassols

The Spa wall or ceiling lamp is suitable for damp areas. Its versatile system enables the luminaries to be placed in a line to illuminate up to six metres of wall or ceiling space.

Model Sheet

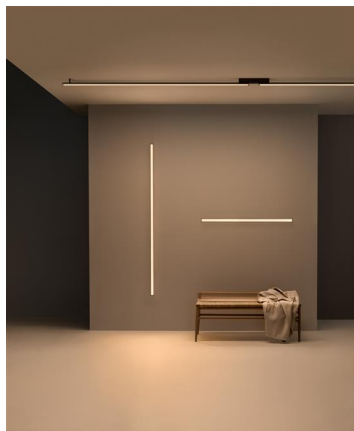


Finish	 11 Black NCS S 8500-N
	 23 Warm White NCS S 0502-Y50R
	 25 Beige D1 NCS S 4005-Y50R

LED temperature color 2700 K / 3500 K

Dimming 1-10V / DALI

Materials Body: Aluminum
Diffuser: PMMA
Ceiling rose: Aluminum

LED  CRI>90 9637 lm 138
2700 K / 3500 K

Driver Constant Current 600
220~240 V V 50~60 Hz HZ

 Dimmable  LED  50-60Hz


 1-10V

Application Ceiling Lamps

Packaging 1 Box
3.3 m x 0.1 m x 0.1 m
Gross weight 5.8
Net weight 3.6
Vol. 0.033


Lighting effect**General Lighting**

Lamp for general lighting that equally distributes the light in all directions.

**Photometric Data**

Go to vibia.com to get the photometric data for the different LED color temperatures.

Efficiency 60.77 lm/W
Coordinate System CG
Total Flux 3215.95 lm
Maximum Value 1373.33 cd

Other Applications

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com