Flamingo mini

1590

Design By Antoni Arola

Flamingo Mini offers an attenuated lighting through its different translucent diffusers, this model invites users to choose between a variety of different configurations thanks to the three installation options.

Model Sheet

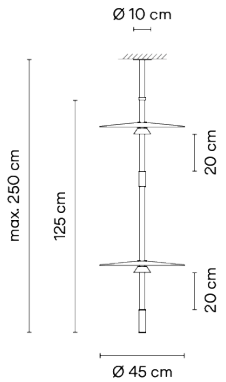

Optional : Extra cable length
Min. quantity, upcharge and extra lead time apply [EN]

Finish	11 Black NCS S 8500-N
LED temperature color	2700 K
Dimming	Push; 1-10V / Casambi / DALI
Instalation type	Surface Canopy / Built-in XS
Materials	Body: Aluminum Shade: PMMA Diffuser: PC- Polycarbonate
Light source	3 x LED 3W 185mA E
LED	CRI>90 1152 lm 132 2700 K
Driver	Constant Current 350 110~240 V V 50~60 Hz HZ □ IP20 Bi-volt 50-60Hz
Application	Hanging lamps
Packaging	2 Box 0.51 m x 0.51 m x 0.165 m Gross weigth 6.5 Net weigth 5 Vol. 0.0502

Lighting effect

General Lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data

All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com