


# STACKING S 120 H NAKED - INDOOR


David Rockwell, 2023

# LEUCOS



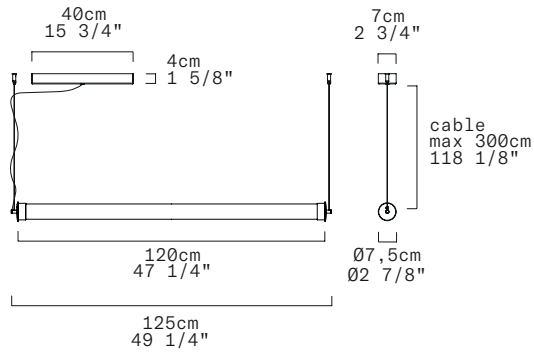

Discover more

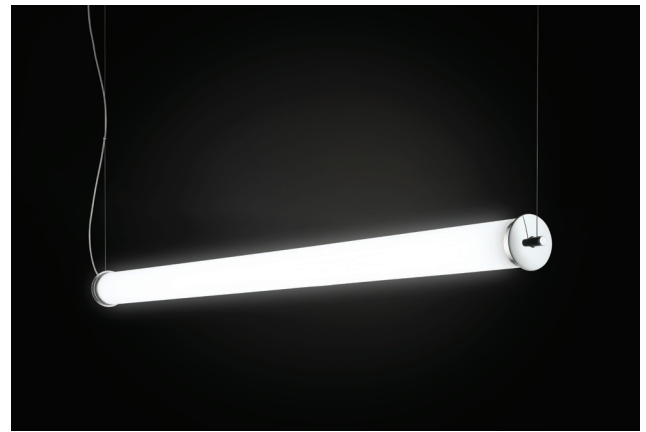REPLACEABLE LED



## TECHNICAL SHEET

MATERIALS	Diffuser: Polymethacrylate Structure: Aluminum	
DIMENSIONS	Diffuser: Ø7,5cm L120cm [Ø2 7/8" L47 1/4"] Canopy: 40cm x 7cm x H4cm [15 3/4" x 2 3/4" x 1 5/8"] Cable lenght: 300cm [118 1/8"]	
CANOPY	Matte white	
LIGHT SOURCE	5 X LED STRIP 24V 28,75W (total) 3306 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 28,75W (total) 3162 lm (nominal) 2700K CRI≥90	
DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
MARKING	DRY LOCATION  	
WEIGHT	Net weight: 3,4kg	

### Standard version (supplied with canopy & driver)

DIMMING PROTOCOL	Push-dim; 0/1-10V, DALI	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
White + Anodized Aluminum	LED 3000K	0012433
	LED 2700K	0012434

### Class 3 version installation with remote driver (supplied without canopy & driver)

DIMMING PROTOCOL	Driver and canopy not included	
FINISH (DIFFUSER + STRUCTURE)	SOURCE	CODE
White + Anodized Aluminum	LED 3000K	0013263
	LED 2700K	0013264

We reserve the right to change our product specifications.  
Please visit [www.leucos.com](http://www.leucos.com) for the latest product information