


STACKING S 90 V NAKED - INDOOR

David Rockwell, 2023

LEUCOS



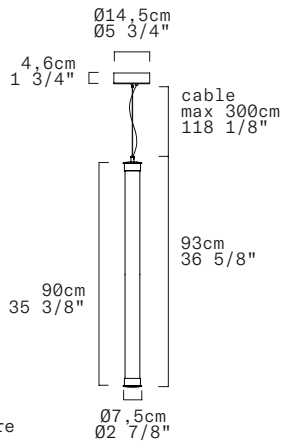

Discover more



REPLACEABLE LED



| TECHNICAL SHEET | |
|------------------|--|
| MATERIALS | Diffuser: Polymethacrylate Structure: Aluminum |
| DIMENSIONS | Diffuser: Ø7,5cm H90cm [Ø2 7/8" H35 3/8"] Canopy: Ø14,5cm H4,6cm [Ø5 3/4" H1 3/4"] Cable lenght: 300cm [118 1/8"] |
| CANOPY | Matte white |
| LIGHT SOURCE | 5 X LED STRIP 24V 21,25W (total) 2443 lm (nominal) 3000K CRI≥90 5 X LED STRIP 24V 21,25W (total) 2337 lm (nominal) 2700K CRI≥90 |
| DIMMING PROTOCOL | Push-dim; 0/1-10V, DALI |
| MARKING | DRY LOCATION   |
| WEIGHT | Net weight: 2,6kg |

Standard version (supplied with canopy & driver)

| DIMMING PROTOCOL | Push-dim; 0/1-10V, DALI | |
|-------------------------------|-------------------------|---------|
| FINISH (DIFFUSER + STRUCTURE) | SOURCE | CODE |
| White + Anodized Aluminum | LED 3000K | 0012435 |
| | LED 2700K | 0012436 |

Class 3 version installation with remote driver (supplied without canopy & driver)

| DIMMING PROTOCOL | Driver and canopy not included | |
|-------------------------------|--------------------------------|---------|
| FINISH (DIFFUSER + STRUCTURE) | SOURCE | CODE |
| White + Anodized Aluminum | LED 3000K | 0013271 |
| | LED 2700K | 0013272 |

We reserve the right to change our product specifications.
Please visit www.leucos.com for the latest product information