


Mounting	Pendant	Source (included)  SMD led 17w 2700K 1700lm  Dimmable by TRIAC - Trailing edge (standard)  DALI and CASAMBI on request.		Marking	( € IP20 \F/ □
Environment	Indoor			Weight	4kgs
Lampshade	Glass			Cord lenght	2000mm adjustable ; other length on request.
Frame	Cord & Metal	<b>Voltage</b> 230 V - 50 hz			



## LIGHT DISTRIBUTION

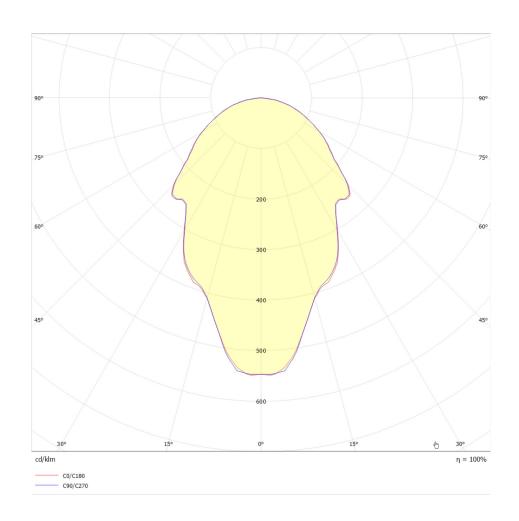

## PHASE-CUT DIMMING

All our products are delivered and tested with analog phase-cut dimming capability.

## DALI

For most situations phase-cut dimming is the right way but for new projects for your modern home or for hospitality projects you may need the digital standard DALI.

We also provide on request led drivers for DALI system, contact us!

## **CASAMBI**

Use your phone as a switch or dimmer.
We provide the good solution with the Casambi system. Ask for it!